



Application – BS4737 Intruder systems and Installations that require a battery back i.e. access control, Entry Systems and General Use

*Pelham Works
Pelham Street
Wolverhampton
WV3 0BJ*



**Part Number: 1201SM- 2 (1 AMP)
1202SM- 2 (2 AMP)
1203SM- 2 (3 AMP)**


Tel: (01902) 656667

Web: www.rgl.co

Email: info@rgl.co



- Full Current Load
- 13.8 volt dc regulated output
- Additional battery charging
- Deep discharge protection
- Current Limiting
- LED Indicators
 - Mains
 - Battery Output
- Short Circuit Protection
- Battery Current Limiting circuit (Electronic)
- Mains Transient Protection
- 310h x 340w x 80d (all mm)
- Weight = 2.6 kilo (boxed)

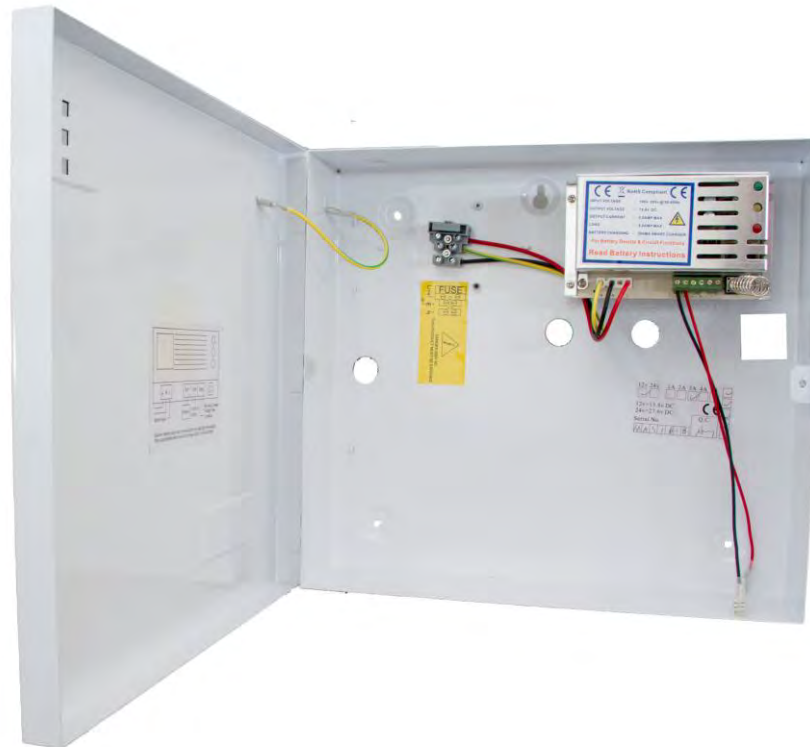

CE APPROVED
EMC TO EN55011
RFI TO EN55022

- Switchmode Technology
- Mild Steel Construction
- White Power Coated
- On Board Tamper Protection
- Vented Enclosure for heat dissipation
- Multiple cable entry point
- Rear Cable entry
- Cable retention points
- Wiring instruction inside products
- More efficient environmentally friendly

Products to Trust – Power to help