


RF-4200-01-x Personal Panic Device Installation Sheet

Description


The Personal Panic Device is a wireless device that can be used to activate police or auxiliary alarms throughout the premises. When the help button is pressed, both red LEDs flash and information is transmitted. The transmitted signal includes alarm and battery status information. When the help button is released, an alarm-restore-all message is sent.

Note: To activate, press and hold the help button until the red LEDs stop flashing, then release the button.

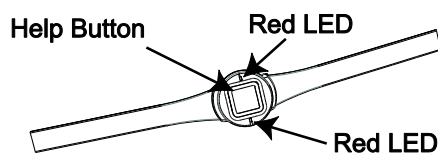

The Personal Panic Device is shipped with a watch type wristband installed. A pendant adaptor kit and lanyard are also included for an optional necklace arrangement. The pendant kit includes a pendant loop and a pendant plug (shown below).

Pendant Kit



The Personal Panic Device is water resistant and has been tested in water at three meters for one hour (class IPX8).

Installation


Assembly Guidelines

- Program the Personal Panic Device into the appropriate panel groups. Refer to the "Programming" section for more information.
- The transmitter on the Personal Panic Device has a maximum range of 375 feet. Test the device at the outer limits of the installation to ensure it works properly. The outer limits may vary due to different environments that may affect the range. Refer to the "Testing" section for more information.
- Verify the user can activate the help button by pressing it with their thumb or finger.
- When worn as a pendant, it is important that the user *does not activate* the help button by pressing it against their chest. This may reduce the signal's effective range.


Watch Style Wristband

Adjust the length of the wristband by measuring and cutting the band in the following manner:


1. Position the wristband tightly around the wrist and in the intended position as shown in Step 2.
2. Using a washable marker, place a mark on the edge of each strap, near the center of the wrist.



3. Align the band so the ends of the band are even. Cut the band in the center of the two marks as shown below.

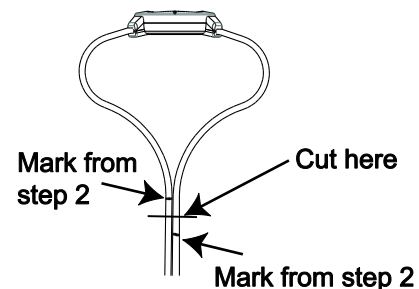


4. Attach the band to the clasp. Feed the band through the retainer opening and close the lever to lock the band in place. Repeat for the other side.

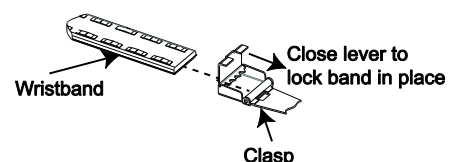


Pendant

The Personal Panic Device can be worn as a pendant by removing the wristband and installing the pendant adaptor components and lanyard in the following manner:


1. Remove the two screws on the back of the Personal Panic Device.
2. Carefully separate the cover and base.
3. Remove the wristband.

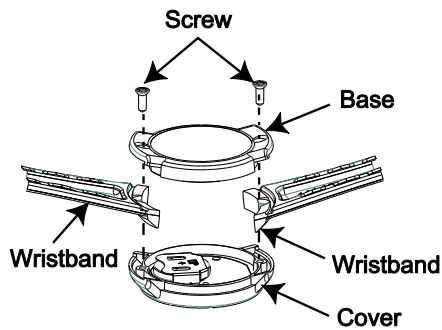

4. Separate the components from the pendant adaptor kit and discard the circular center section.
5. Insert the pendant loop adapter into the small loop end of the lanyard.

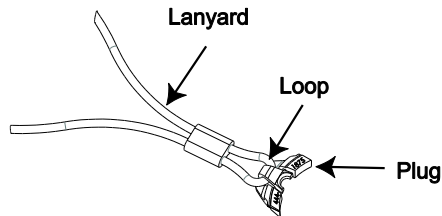

6. Insert the plugs into the base and reattach the cover and base.
Note: Compress the panic button and base assembly together before tightening the screws.

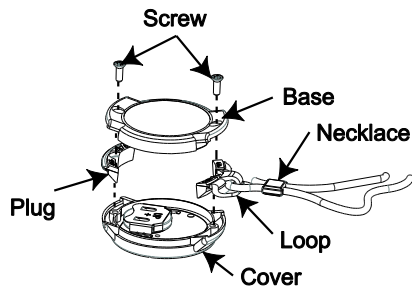

Programming

Review the following information for adding a Personal Panic Device to the panel. Refer to the specific panel *Installation Instructions* for further detail.

1. Set the panel to Program Mode.
2. When prompted, enter the appropriate group number and select the desired sensor number.
3. Press the help button on the Personal Panic Device to trip the selected sensor.
4. Exit from Program Mode.

Maintenance and Testing

Testing

Review the following for testing the help button. Refer to the specific panel *Installation Instructions* for further detail.

1. Set the panel to Sensor Test Mode.

2. Press and hold the help button for a second to monitor the beeps for the packet count.
3. Listen for the panel siren. You should hear 6 to 8 beeps.
4. Test the help button from several locations to ensure a consistent response.
5. Test the help button weekly to ensure proper operation.
6. Verify the end-user can operate the unit without any difficulty.

Cleaning

1. Gently rub a lanoline-based cleaner, such as Go-Jo, onto all surfaces of the Personal Panic Device to remove any debris.
2. Rinse off using warm water.
3. Wipe clean using a dry, lint-free cloth.

Replacing the Battery

Caution: To avoid an alarm condition set the panel to Sensor Test Mode prior to changing the battery.

Caution: Use static electricity precautions when handling electronic components.

1. Depending on the situation, it may be necessary to contact the central monitoring station before starting the installation.
2. Remove the two screws on the back of the Personal Panic Device and observe how the pendant or wristband components are attached.
3. Carefully separate the cover and base.
4. Remove the electronic subassembly from the base.
5. Remove the battery from the electronic subassembly.
6. Install the new battery. Observe polarity.

Note: Install Panasonic CR1632.

WARNINGS: Risk of explosion if the battery is replaced by an incorrect type, disposed of into fire or placed into hot oven, or mechanically crushed or cut.


Do not ingest battery, Chemical Burn Hazard!

This product contains a coin / button cell battery. If the coin / button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.

Keep new and used batteries away from children.

If the battery compartment does not close securely, stop using the product and keep it away from children.

If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

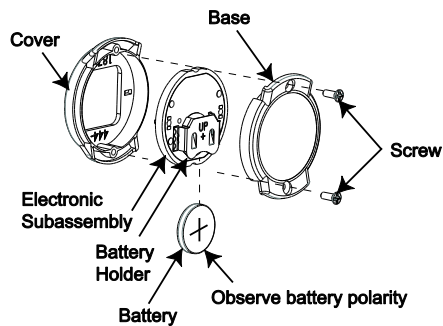

7. Place the electronic sub assembly into the base.
Note: A generic diagram is shown above. For diagrams showing the wristband and pendant configurations, see the assembly diagrams in the “*Installation/Pendant*” section.
8. Inspect the water seal area and the plugs to ensure they are free from debris.
9. Reattach the cover, lanyard assembly or wristband and the base.
Note: Press the pushbutton and cover together before tightening the screws.
10. Test the help button for proper operation.
11. If the central monitoring station was notified, inform them this operation is complete.

Specifications

Model no.	RF-4200-01-1 (white) RF-4200-01-2 (black)
Wireless operating frequency band	433.05 – 434.79 MHz
Maximum power output	10 dBm
Compatibility	Interlogix Learn Mode Panels and Receivers
Battery type	3.0 V lithium (CR1632)
Recommended battery	Panasonic CR1632
Typical standby current (µA)	≤ 1
Estimated battery life	5 years
Supervisory interval	Less than 64 minutes
Operating temperature range	0 to 49°C (32 to 120°F)
Storage temperature range	-34 to 60°C (-30 to 140°F)
Relative humidity	5-90% non-condensing
Dimensions (L x W x D)	4.1 x 3.6 x 1.0 cm (1.60 x 1.40 x 0.410 in.)

Regulatory Information

Manufacturer	Placed on the market by: UTC Fire & Security Americas Corporation, Inc. 3211 Progress Drive, Lincolnton, NC, 28092, USA Authorized EU manufacturing representative: UTC Fire & Security B.V. Kelvinstraat 7, 6003 DH Weert, Netherlands
--------------	--

Certification 

Product warnings and disclaimers



THESE PRODUCTS ARE INTENDED FOR SALE TO AND INSTALLATION BY QUALIFIED PROFESSIONALS. UTC FIRE & SECURITY CANNOT PROVIDE ANY ASSURANCE THAT ANY PERSON OR ENTITY BUYING ITS PRODUCTS, INCLUDING ANY “AUTHORIZED DEALER” OR “AUTHORIZED RESELLER”, IS PROPERLY TRAINED OR EXPERIENCED TO CORRECTLY INSTALL FIRE AND SECURITY RELATED PRODUCTS.

For more information on warranty disclaimers and product safety information, please check <https://firesecurityproducts.com/policy/product-warning/> or scan the QR code.

European Union directives

UTC Fire & Security hereby declares that this device is in compliance with the applicable requirements and provisions of all applicable rules and regulations, including but not limited to the Directive 2014/53/EU. For more information see: <https://www.utcssecurityproducts.eu/>



2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.utcssecurityproducts.eu/recycle/



This product may contain a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling return the battery to your supplier or to a designated collection point. For more information see www.utcssecurityproducts.eu/recycle/

Contact information

www.utcfireandsecurity.com

For customer support EMEA, see www.utcssecurityproducts.eu