



AVVERTENZE

- La sorgente luminosa è di tipo LED non sostituibile.

- Temperatura di funzionamento da 0° a 40°C.

- Sostituire la batteria quando non si raggiunge l'autonomia nominale dopo il corrispondente periodo di ricarica.

- Per l'eventuale sostituzione di batterie o altre riparazioni, rivolgersi ad un centro di assistenza tecnica autorizzato e richiedere l'utilizzo di ricambi originali. Il mancato rispetto di quanto sopra può compromettere la sicurezza dell'apparecchio.

- Il prodotto contiene batterie ricaricabili LiFePO₄ che devono essere smaltite negli appositi cassonetti.

SEGNALAZIONI LED

VERDE FISSO: presenza rete, nessuna anomalia.

VERDE LAMPEGGIANTE: test in corso.

ROSSO FISSO: lampada guasta o batteria scollegata.

ROSSO LAMPEGGIANTE: batteria guasta.

VERDE LUNGO ALTERNATO A ROSSO IMPULSIVO: test disabilitati, lampada inibita.

Solo per apparecchi con supervisione su BUS

VERDE-ROSSO ALTERNATI LENTI: monitor bus attivo.

VERDE-ROSSO ALTERNATI VELOCI: localizzazione attivata.

PERIODICITA' DEI TEST AUTOMATICI (escluso cod.

HPDVSA110242 - HPDVSA180142)

TEST FUNZIONALE: ogni 14 giorni

TEST DI AUTONOMIA: ogni 28 giorni

Solo per apparecchi auto-test

PROCEDURA DI SINCRONIZZAZIONE TEST FUNZIONALI E DI AUTONOMIA

- Verificare che gli apparecchi siano alimentati da rete elettrica 230Vac.
- Disabilitare i test aprendo l'interruttore di inibizione o tramite comando OFF con INICOM.
- Aspettare 10 secondi.
- Riabilitare i test chiudendo l'interruttore di inibizione o tramite comando ON con INICOM.

Nota: questa procedura va effettuata su ogni lampada.
Esempio: se si vuole che la lampada esegua i test nella mattinata di lunedì, l'operazione va fatta di lunedì in un orario diurno (es. ore 9:00).



WARNING

- The light source is a non-replaceable LED.

- Operating temperature 0° to 40°C.

- Replace the battery when the nominal power is not reached after the corresponding charging period.

- For eventual replacement of batteries or any other repairs, contact an authorized service centre for assistance and request the use of original spare parts. Failure to comply with this recommendation could affect device safety.

- The product contains LiFePO₄ rechargeable batteries that must be disposed of in the appropriate bins.

LED SIGNALS

SOLID GREEN: mains present, no anomaly.

FLASHING GREEN: test in progress.

SOLID RED: lamp fault or battery disconnected.

FLASHING RED: battery fault.

STEADY GREEN ALTERNATING TO PULSING RED: tests disabled, lamp inhibited.

Only for supervised devices connected to the BUS

GREEN-RED ALTERNATING TO SLOW: bus monitor active.

GREEN-RED ALTERNATING TO FAST: localization activated.

FREQUENCY OF AUTOMATIC TESTS (excluding cod.

HPDVSA110242 - HPDVSA180142)

FUNCTIONAL TEST : every 14 days

AUTONOMY TEST : every 28 days


For self-testing devices only

SYNC PROCEDURE FOR FUNCTIONAL AND AUTONOMY TESTS

- Check that the devices are powered by the 230Vac mains.
- Disable the tests by means of the inhibition switch or OFF command with INICOM.
- Wait 10 seconds.
- Re-enable the tests by means of the inhibition switch or ON command with INICOM.

Note: this procedure must be carried out on each lamp.

Example: if you want the lamp to perform the tests on Monday mornings, the operation should be done on Monday during the day time (e.g. 09:00).



DIVA

IP42-IP65





inim
ELECTRONICS






EN 60598-2-22; EN 60598-1; EN 62031; EN 62778; EN 61347-2-13;
EN 61347-2-7; EN 55015; EN 61547; EN 61000-3-2; EN 61000-3-3

cod. HPDVSA110242 - HPDVSA180142

HPDVAA110242 - HPDVAA180142 - HPDVAA240142

HPDVBA110242 - HPDVBA180142 - HPVDBA240142

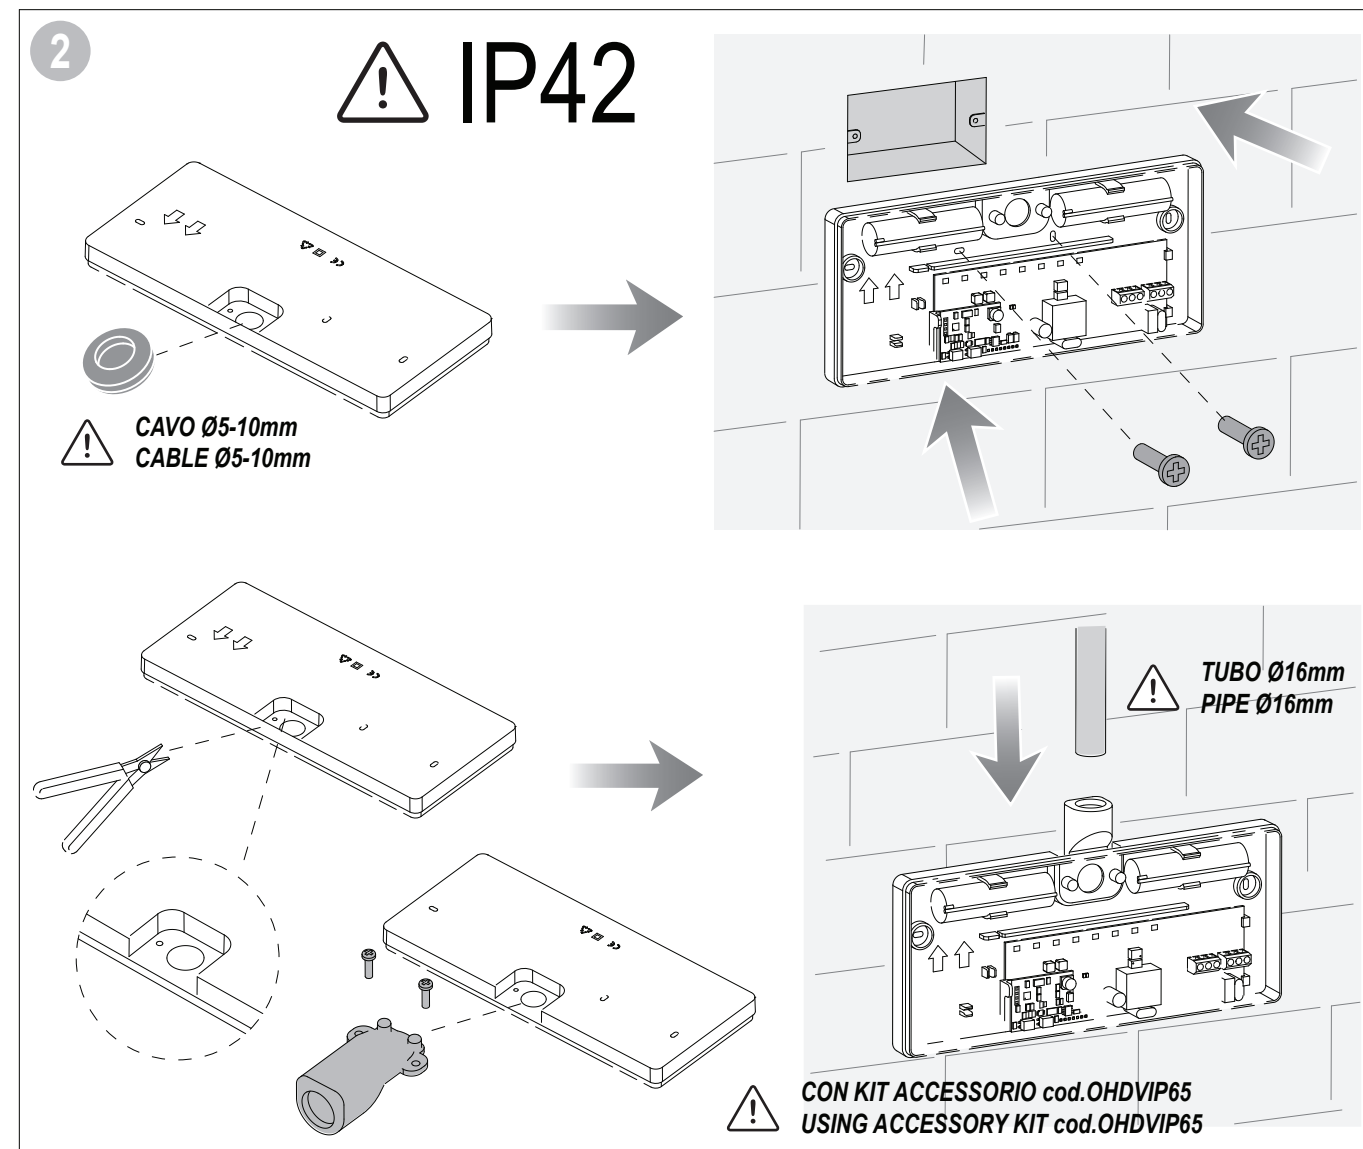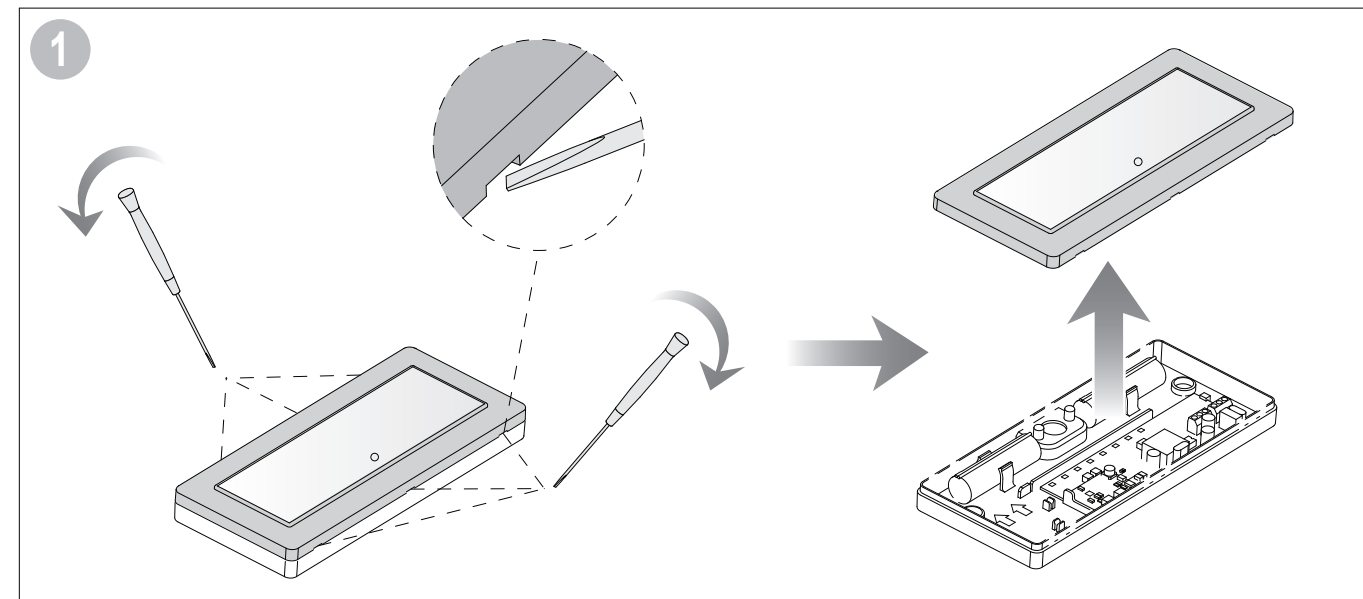

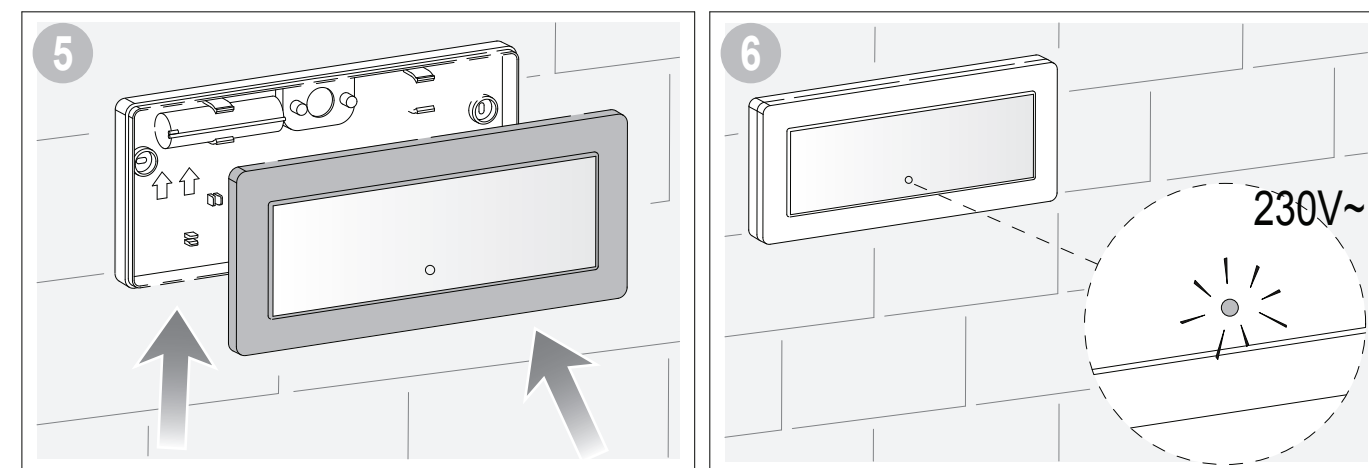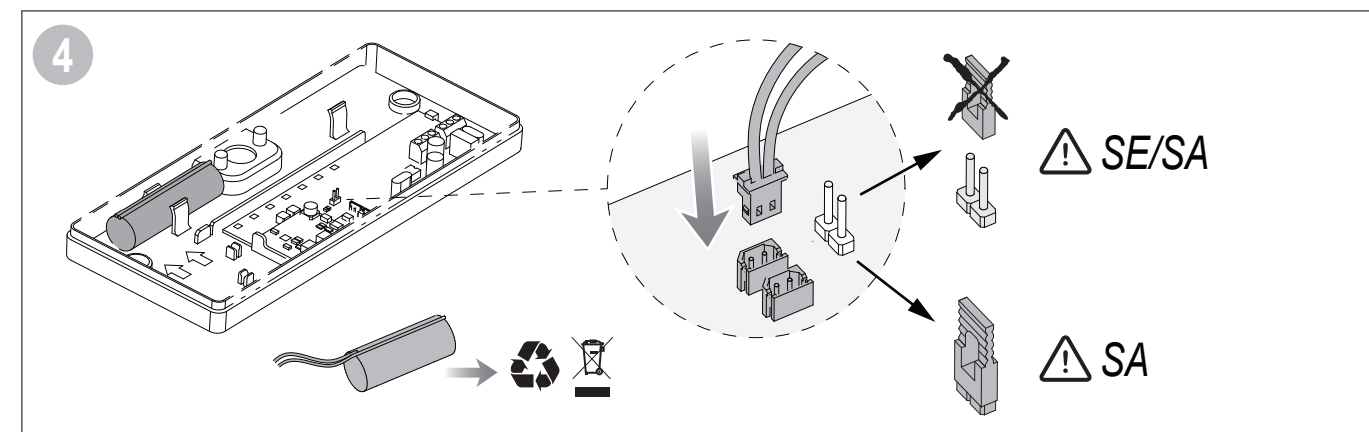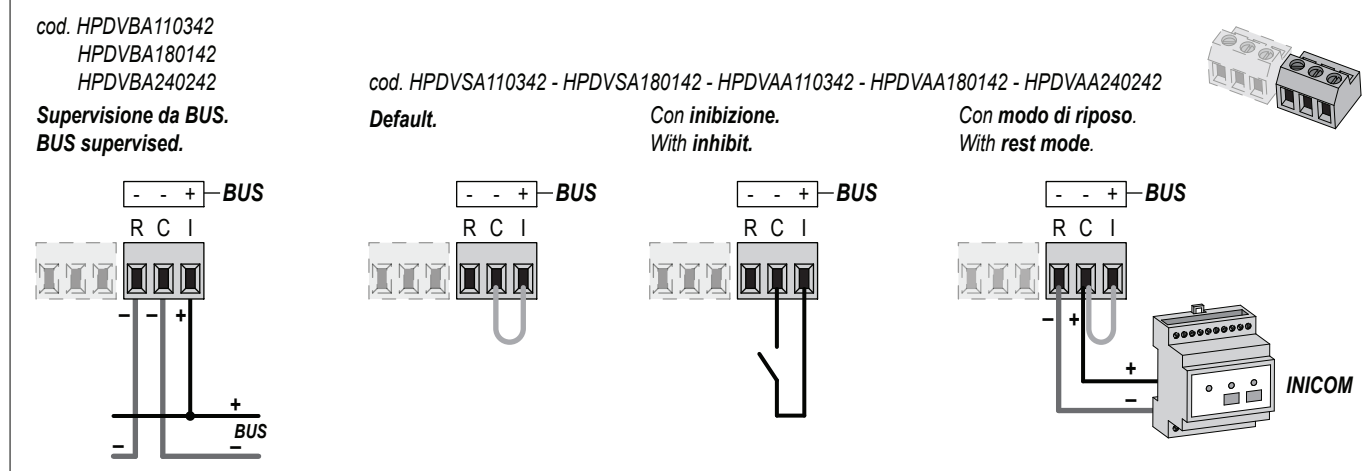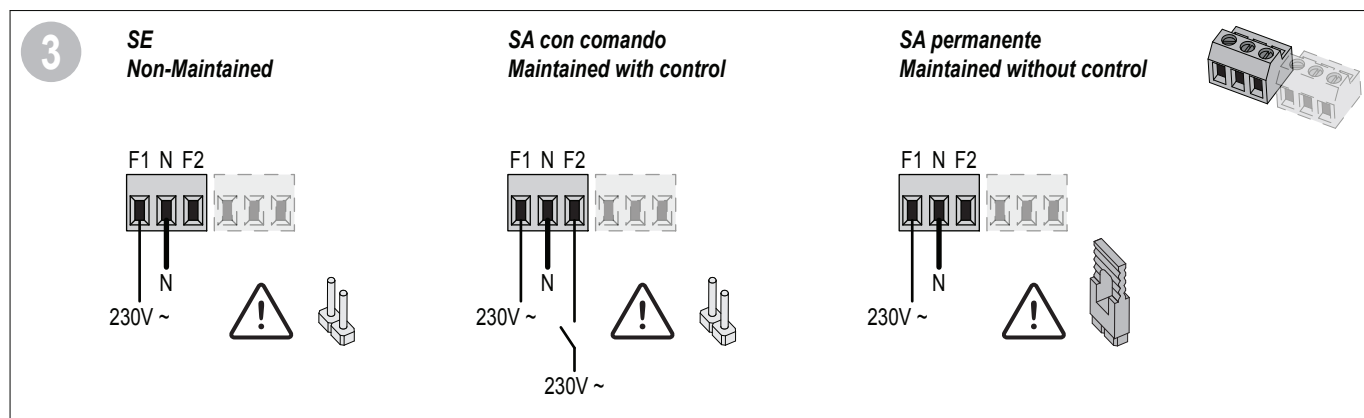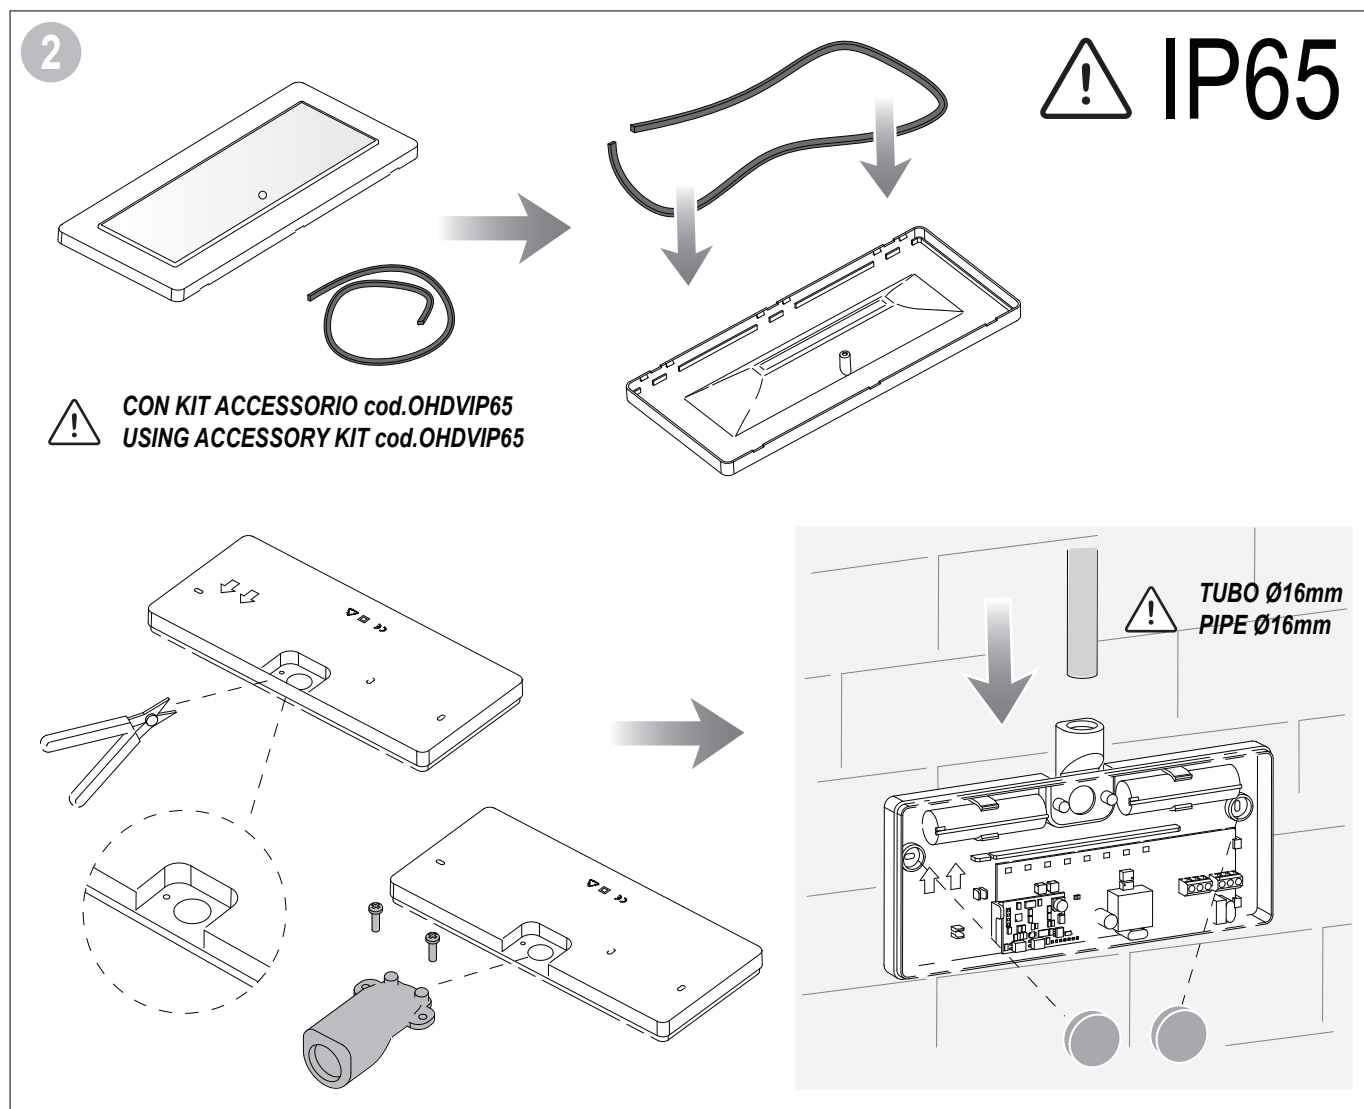

	230V 50Hz	COSφ	LED	h	LiFePO ₄	Maintained Non-Maint.	Im Non-Maint.	Im Maintained	IP	100%
HPDV S A 110242	20mA	0,65	5 LED	2h	3,2V 1,5Ah	M - N/M	180	180	42	6h
HPDV S A 180142	20mA	0,65	9 LED	1,5h	3,2V 1,5Ah	M - N/M	320	180	42	6h
HPDV A A 110242	20mA	0,65	5 LED	2h	3,2V 1,5Ah	M - N/M	180	180	42	6h
HPDV A A 180142	20mA	0,65	9 LED	1h	3,2V 1,5Ah	M - N/M	320	180	42	6h
HPDV A A 240142	30mA	0,65	9 LED	1,5h	2 x 3,2V 1,5Ah	M - N/M	400	220	42	12h
HPDV B A 110242	20mA	0,65	5 LED	2h	1,5Ah	M - N/M	180	180	42	6h
HPDV B A 180142	20mA	0,65	9 LED	1h	1,5Ah	M - N/M	320	180	42	6h
HPDV B A 240142	30mA	0,65	9 LED	1,5h	2 x 3,2V 1,5Ah	M - N/M	400	220	42	12h