




## Overview

MCLASS™ Unified Power Systems combine FlexPower® power modules alongside Mercury Security™ access hardware in one compact and secure UL Listed solution.

This unit is a 12V and 24V DC dual voltage access power system.

The C4 lock control module provides four access control inputs capable of voltage or dry contact activation and outputs programmable for failsafe / failsecure operation at either 12 or 24 VDC and controlled by the integrated fire alarm interface circuit on the FPO. One D8P module provides eight auxiliary class II outputs and each output is configurable for 12 or 24VDC operation.

MCLASS enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch.

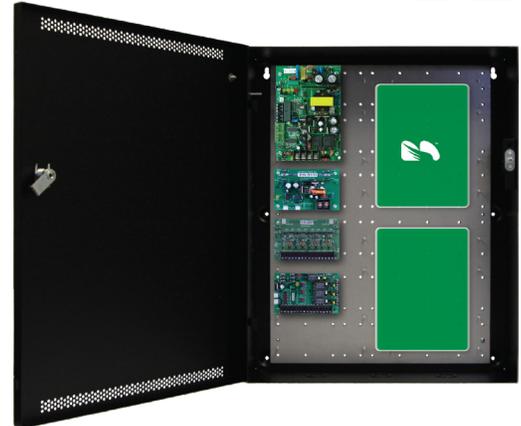

## System Features

- ◆ **FPO offline power supply**
  - 120 or 230 VAC input
  - 12 and 24 VDC outputs
  - On board Fire Alarm Interface
  - Continuous and resettable DC
- ◆ **Distributed output module**
  - Eight auxiliary - class II at 2.5A each
  - Four lock control - fused at 3A each
- ◆ **Expansion options**
  - Increased power, multiple voltages
  - Additional distribution outputs
  - Network monitoring and reporting
- ◆ **Lifetime Warranty**

## Enclosure Features

- ◆ **Labor saving design**
  - Pre-wired power section
  - Pre-punched knockouts
  - Removeable backplate simplifies installs
  - Pre-defined hole pattern for power section
  - Access panels mount on threaded studs - no drilling required
- ◆ **Additional benefits**
  - Wire management room
  - 4.5" enclosure depth fits battery set
  - Tamper switch, lock, dual key set standard
  - Mounting hardware for access boards included

## Ordering

FP075-B100C4D8PE2M

## Description

150W (12V & 24V) 4 lock / 8 aux outputs, MCLASS encl.



## Specifications


<b>Input Power</b>	Input 120/230 VAC 50/60 Hz   83 Watts (0.70A) Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
<b>Output Power</b>	2A@12V and 2A@24V DC, 75W maximum combined output power Outputs: Continuous (DC1) Resettable (DC2) 4 control outputs, fused at 3A each 8 auxiliary outputs, class II power limited at 2.5A each 120 mV output voltage ripple System Efficiency: 83%   System BTU Rating: 33 BTU/Hr
<b>Battery Charging</b>	Independent built-in 1A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
<b>Supervision</b>	AC Fail (form "C" contacts) System fail (form "C" contacts) may be triggered by low/no battery, short to earth ground and power supply failure
<b>Visual Indicators</b>	AC input, DC1 and DC2 output System fault   AC fault   Short to earth ground   Reverse battery polarity Fire Alarm Input activated B100: DC input / output and fault C4: DC output and fault D8P: DC output
<b>Regulatory Compliance</b>	UL294, UL603, UL1076, ULC S318, ULC S319
<b>Mercury/LSP</b>	CSA C22.2 #107.1, CSA 22.2 #60950
<b>Joint Listing</b>	CSFM / FCC Part 15, Subpart B CE
<b>Enclosure Dimensions</b>	Size: 20.00H x 16.00W x 4.50D in. (50.00 x 40.00 x 11.50 cm)   Weight: 18 lbs
<b>Access Panel Mounting</b>	EP1501, EP1502, EP4502, EP2500, MR50, MR51e, MR52, MR16, LNL-500, 1100, 1200, 1300, 1320, 2000, 2210, 2220, 3300

**E2M Mercury Mounting Guide**


Mercury	Slots w/Power	Slots all Mercury
EP1502 / 4502	3	4
EP2500 / MUX8	3	4
MR16in / MR16out	3	4
MR50	1	1
EP1501 / MR51e	2	3

**Enclosure Features**

- ◆ **Custom Backplate**
  - LSP power modules pre-wired along left side
  - Three MR52 or three POE controllers
- ◆ **Mechanical**
  - 4.5" cabinet depth
  - Removable door with "fast disconnect" ground strap
  - Multiple knockouts all four sides
  - Network module mounting holes for field upgrade

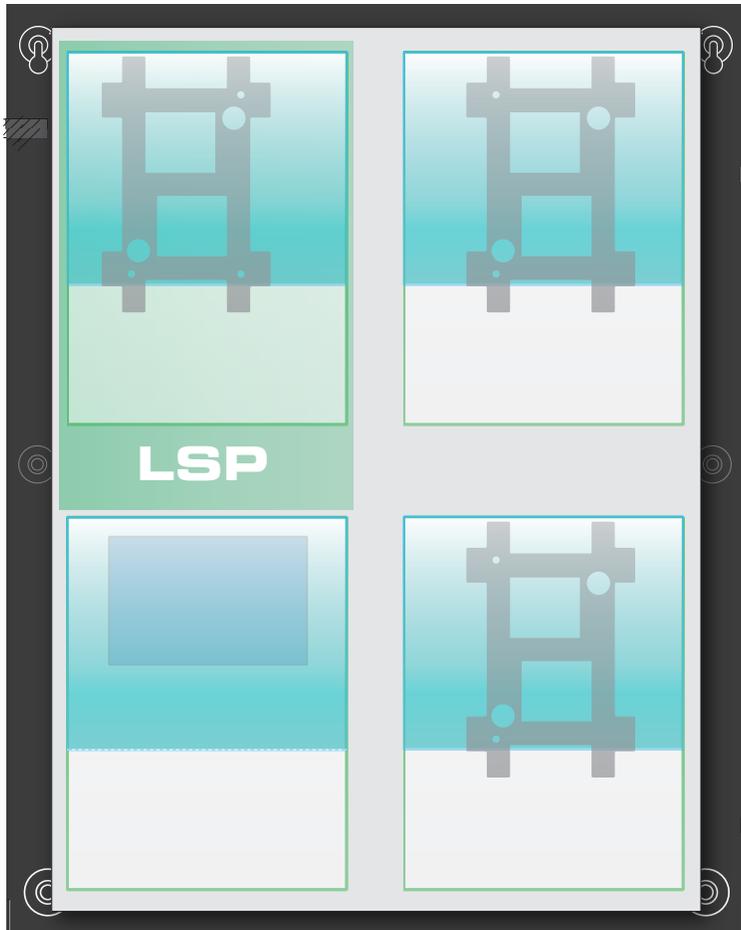

## Enclosure Dimensions (H x W x D) 20.00" x 16.00" x 4.50" (51 x 41 x 11.4 cm)

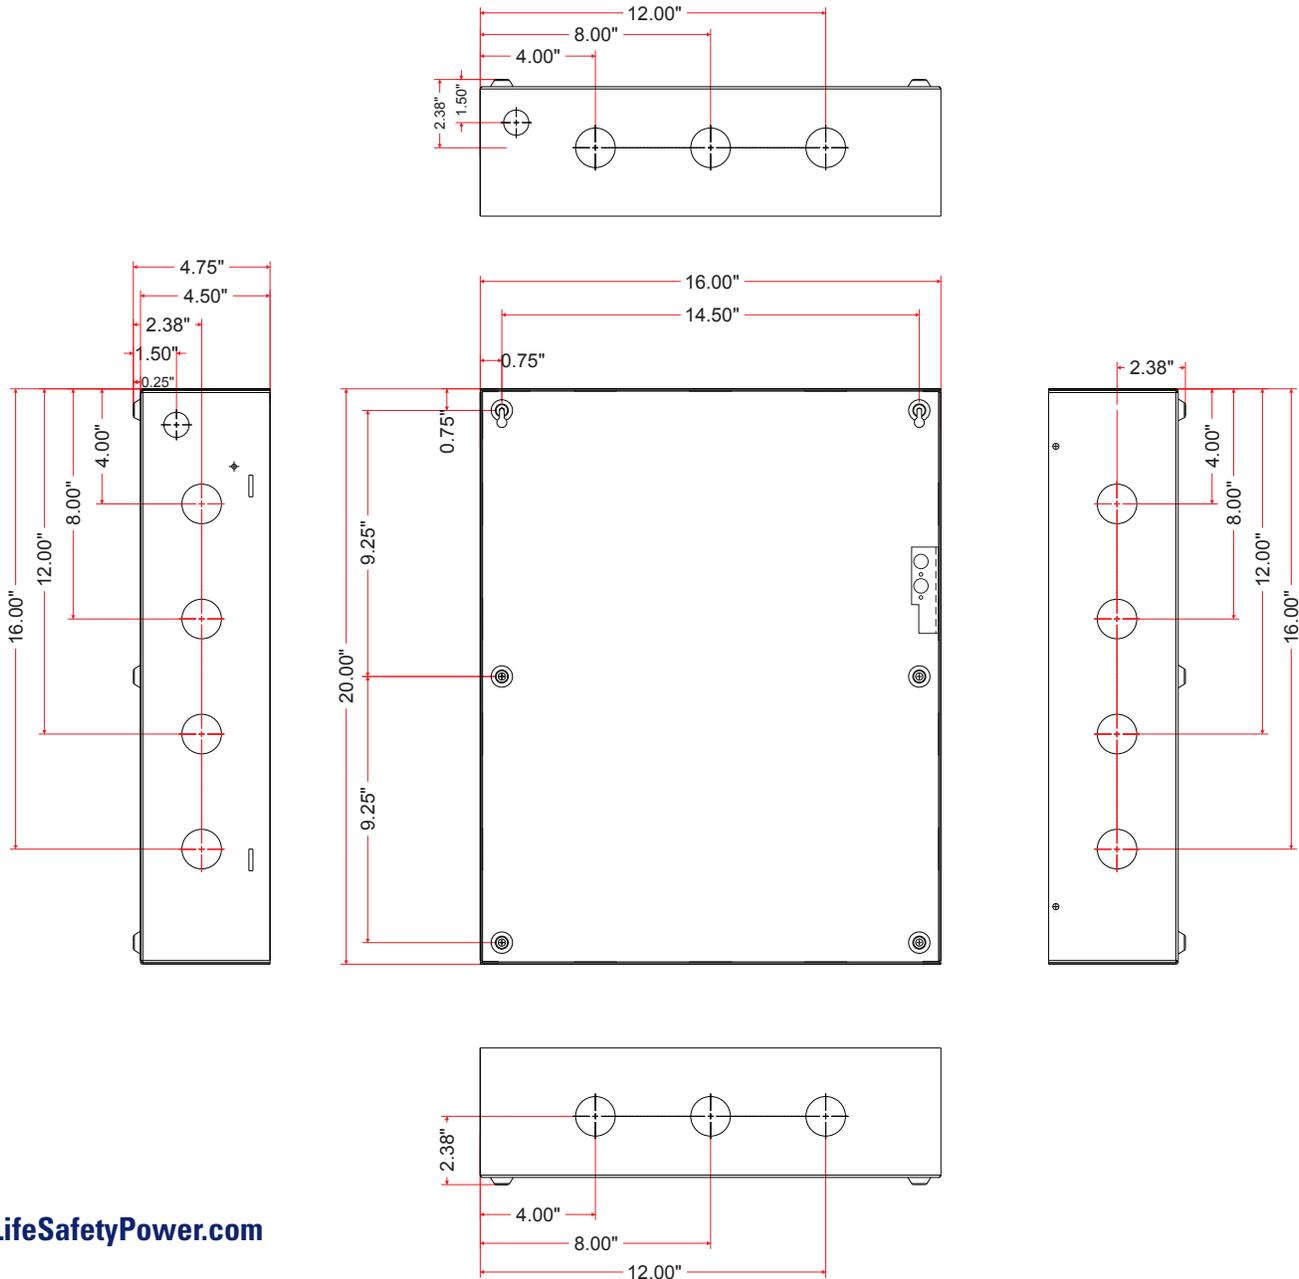

**LifeSafetyPower.com**

(888) 577-2898  
info@lifesafetypower.com

Specifications subject to change without notice.

© 2018 LifeSafety Power Inc. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power Inc. This literature is for guidance only. It does not constitute recommendations, representation, or advice, nor is it part of any contract. Our policy is one of continuous product improvement, and the right is reserved to modify the specifications contained herein without notice.

P01-754A 08/18

**LifeSafety Power, Inc.**  
304 Terrace Drive  
Mundelein, IL 60060 USA