IMJTV-JB
Conduit Box

Installation Guide

C6693M

Mounting Dimensions

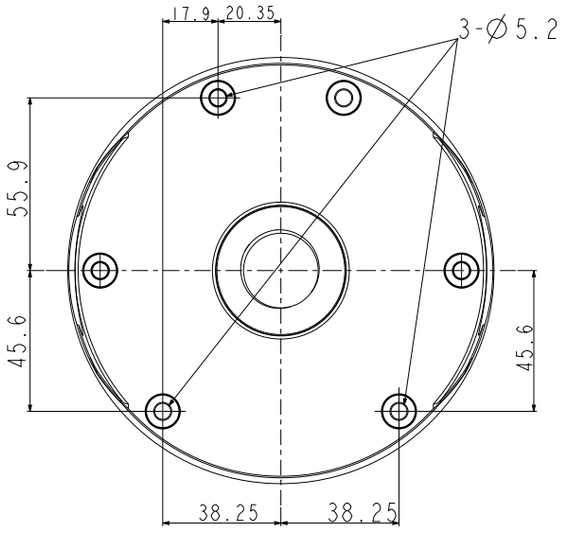

Package Contents

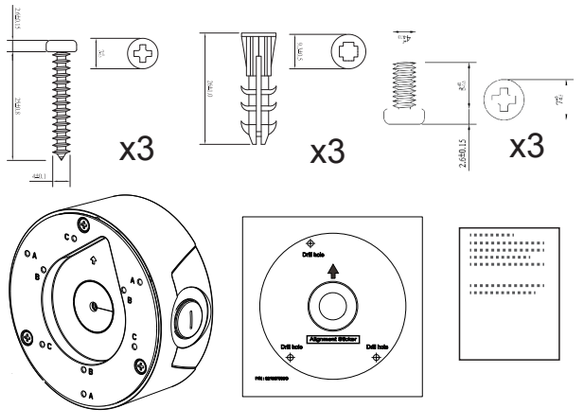

Installation

Remove the top cover.

1

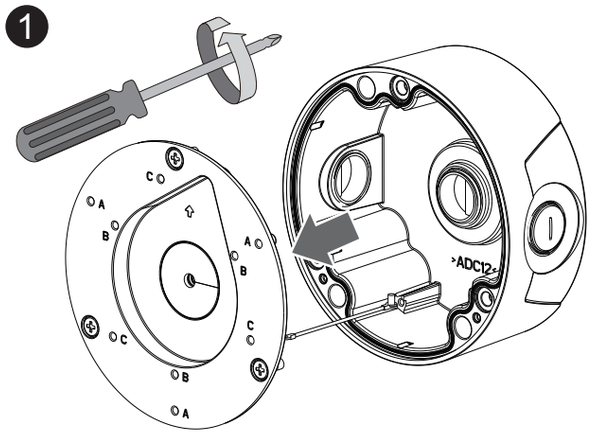

A 3/4" conduit is required for routing the cables with waterproof connection.

2

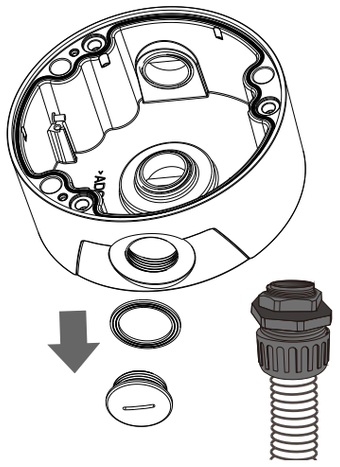

Install the cable gland and pass cables through it.

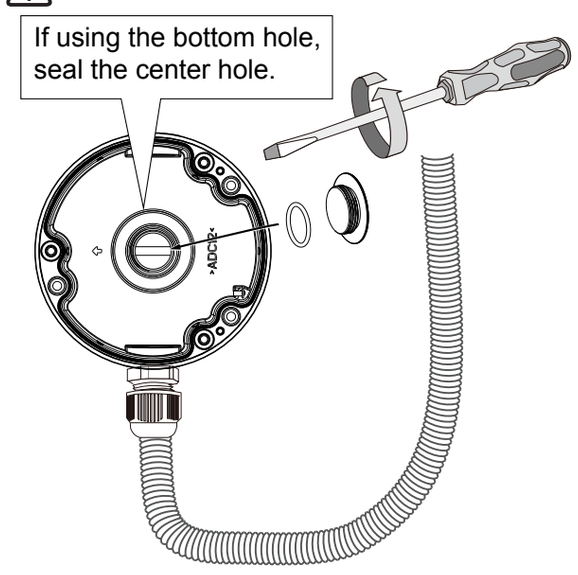

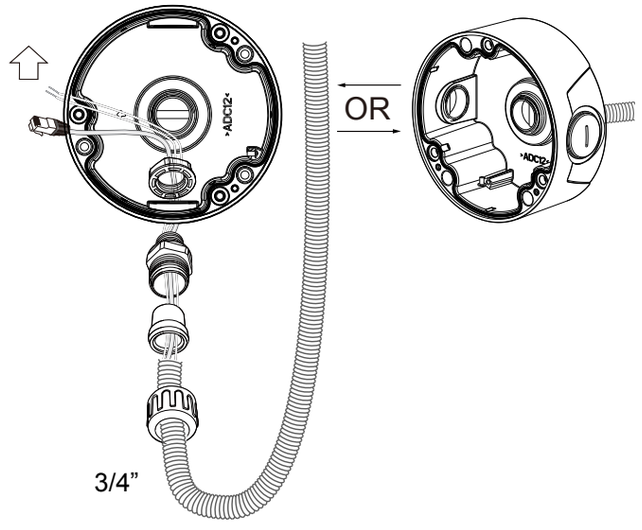

3 Attach the included alignment sticker to a preferred position. Drill holes on the wall and install the junction box. If space behind the wall allows, you may also pass cables through the wall.

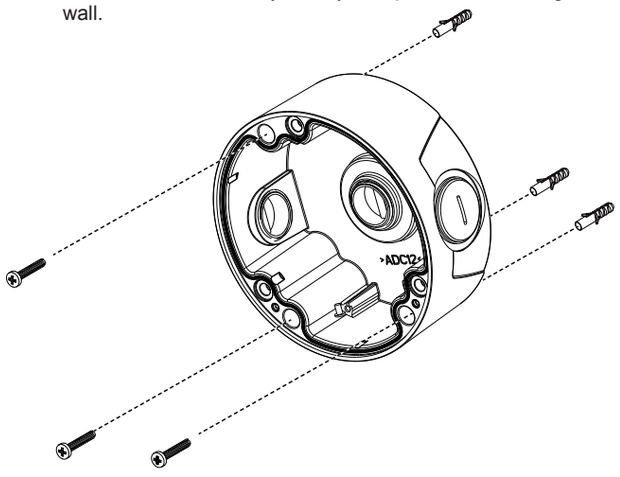

4 Loosen and remove the camera top cover. (Using one of the supported cameras as an example)

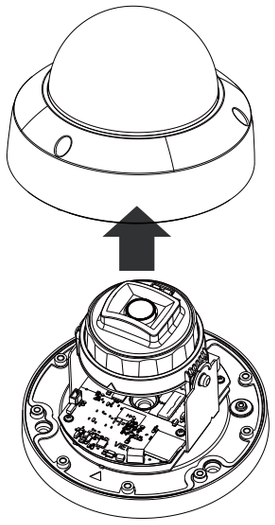

5 Pass the camera's Ethernet cable through the center hole of the box and the rubber seal.

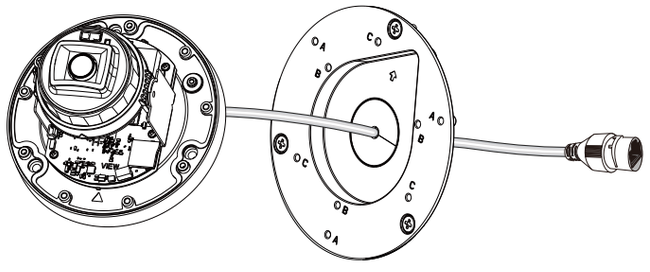

6 Install the waterproof components of the cable gland to your Ethernet cable following the QIG of your camera. The cable gland will be placed within the protection of the box.

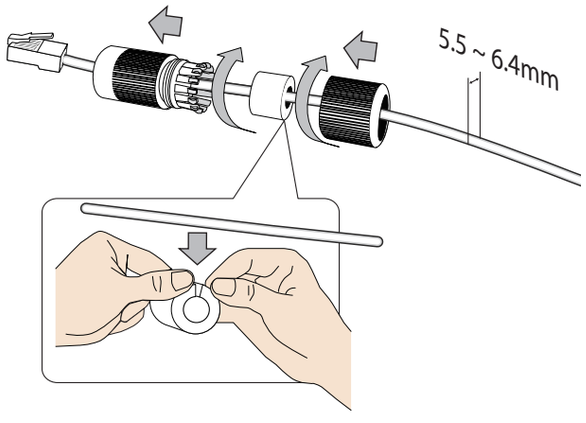

7 Make sure the rubber seal is properly installed to the center hole. The outer rim of the seal must be through and cover the edge of the hole.

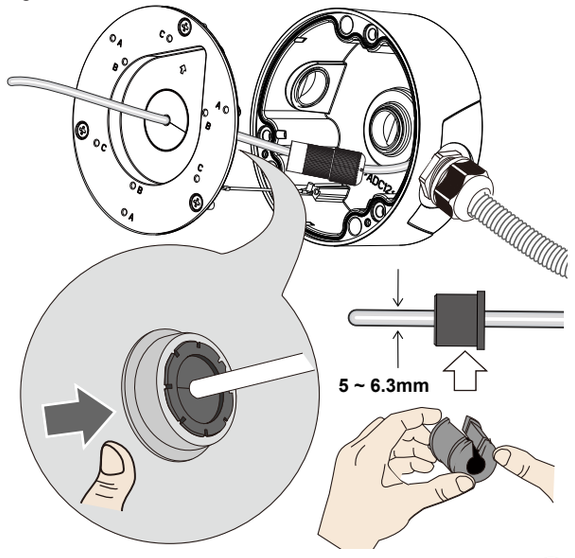

8 Mounting hole locations:
A: IMV Series
B: ITV Series
C: IJV Series

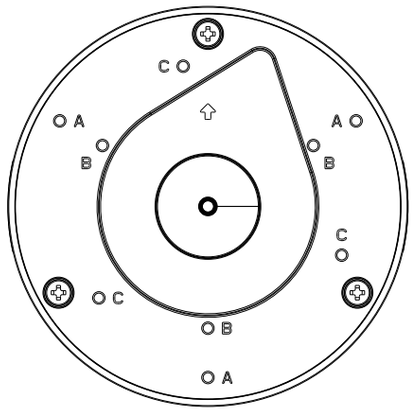

9 Secure the top cover by fastening 3 cross-head screws.

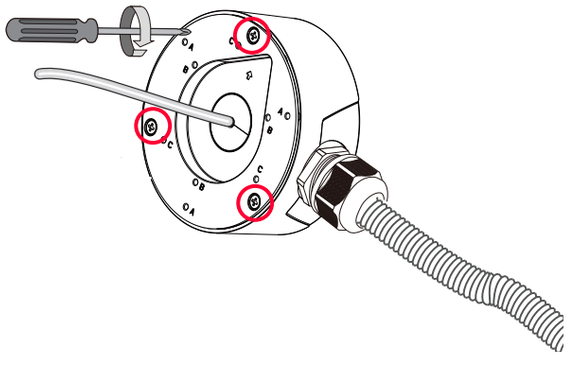

10 Install the camera using the corresponding mounting holes.

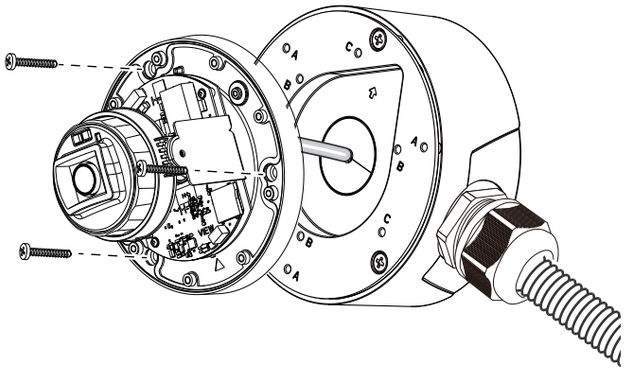

11 Open a live view page on the camera's web user interface and point the camera to obtain the desired field of view.

Secure the camera lower dome.

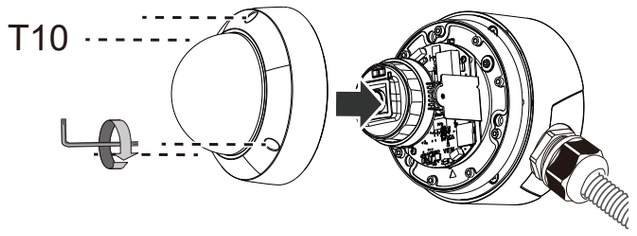

Pelco, Inc.
625 W. Alluvial, Fresno, California 93711 United States
USA & Canada Tel (800) 289-9100 Fax (800) 289-9150
International Tel +1 (559) 292-1981 Fax +1 (559) 348-1120
www.pelco.com