


TruVision TVD-PPB Pendant Mount Installation Instructions

Specifications

Dimensions: 150 × 537 mm (5.90 × 21.14 in.)

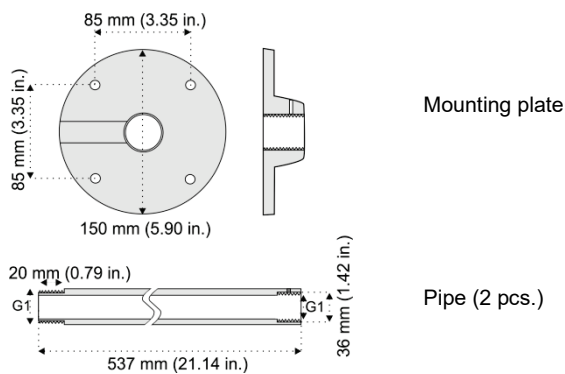

Pipe threading information

Pipe thread size	Threads/ in	Pitch (mm)	Thread major diameter	
			(mm)	(in.)
G 1	11	2.309	33.249	1.309


Corresponding pipe				Tapping drill size (mm)
DN	OD (mm)	OD (in.)	Thickness (mm)	BSP. F (G)
25	33.7	1.33	3.2	30.75

Weight: 1169 g (2.56 lb.)

Accessories:


Expansion anchors: 4 pcs

Used to install the pendant mount to the mounting surface.

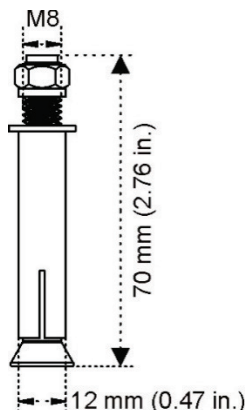

Locking screw A: 5 pcs.

Used to secure the pole to the other components.



Supported cup bases and back boxes

The pendant mount can be used with the following TruVision accessories:

- TVW-AWB-1
- TVW-DVM
- TVD-CB2
- TVD-CB3
- TVD-CB5A
- TVD-CB6
- TVD-CB7
- TVF-CBM


Installation

For detailed instructions, refer to the installation guide for the camera that you are installing. The following requirements are mandatory precautions.


- The mounting surface must be thick enough to install the expansion anchors.
- Ensure that the mounting surface is strong enough to withstand more than eight times the weight of the camera and pendant mount.

To attach a camera to the wall mount (TVD-PPB):

1. Choose the appropriate location on the mounting surface. Use the pendant base to mark the holes for the expansion anchors and to also provide access for the cables before installing with the mount.
2. Drill holes in the mounting surface and install the four expansion anchors.
3. Screw the mounting plate onto the tube and fasten with the locking screw, as shown.



- 4. Route the cables through the pendant mount base and tube.
- 5. Secure the pendant mount base to the mounting surface using the hardware provided with the expansion anchors.

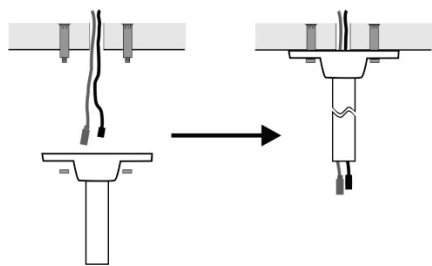

- 6. To complete camera installation, refer to the installation instructions for the specific camera and accessory.

Legal and regulatory information

Copyright © 2021 Carrier. All rights reserved. Specifications subject to change without prior notice.
This document may not be copied in whole or in part or otherwise reproduced without prior written consent from Carrier, except where specifically permitted under US and international copyright law.

Trademarks and patents TruVision names and logos are a product brand of Aritech, a part of Carrier.
Other trade names used in this document may be trademarks or registered trademarks of the manufacturers or vendors of the respective products.

Certification   

EU directives 

Contact information EMEA: <https://firesecurityproducts.com>
Australian/New Zealand: <https://firesecurityproducts.com.au/>

Product documentation Please consult the following web link to retrieve the electronic version of the product documentation. The manuals are available in several languages.

