Exemple de raccordement de 3 portes — Connection example of 3 doors — Aansluitvoorbeeld van 3 deuren

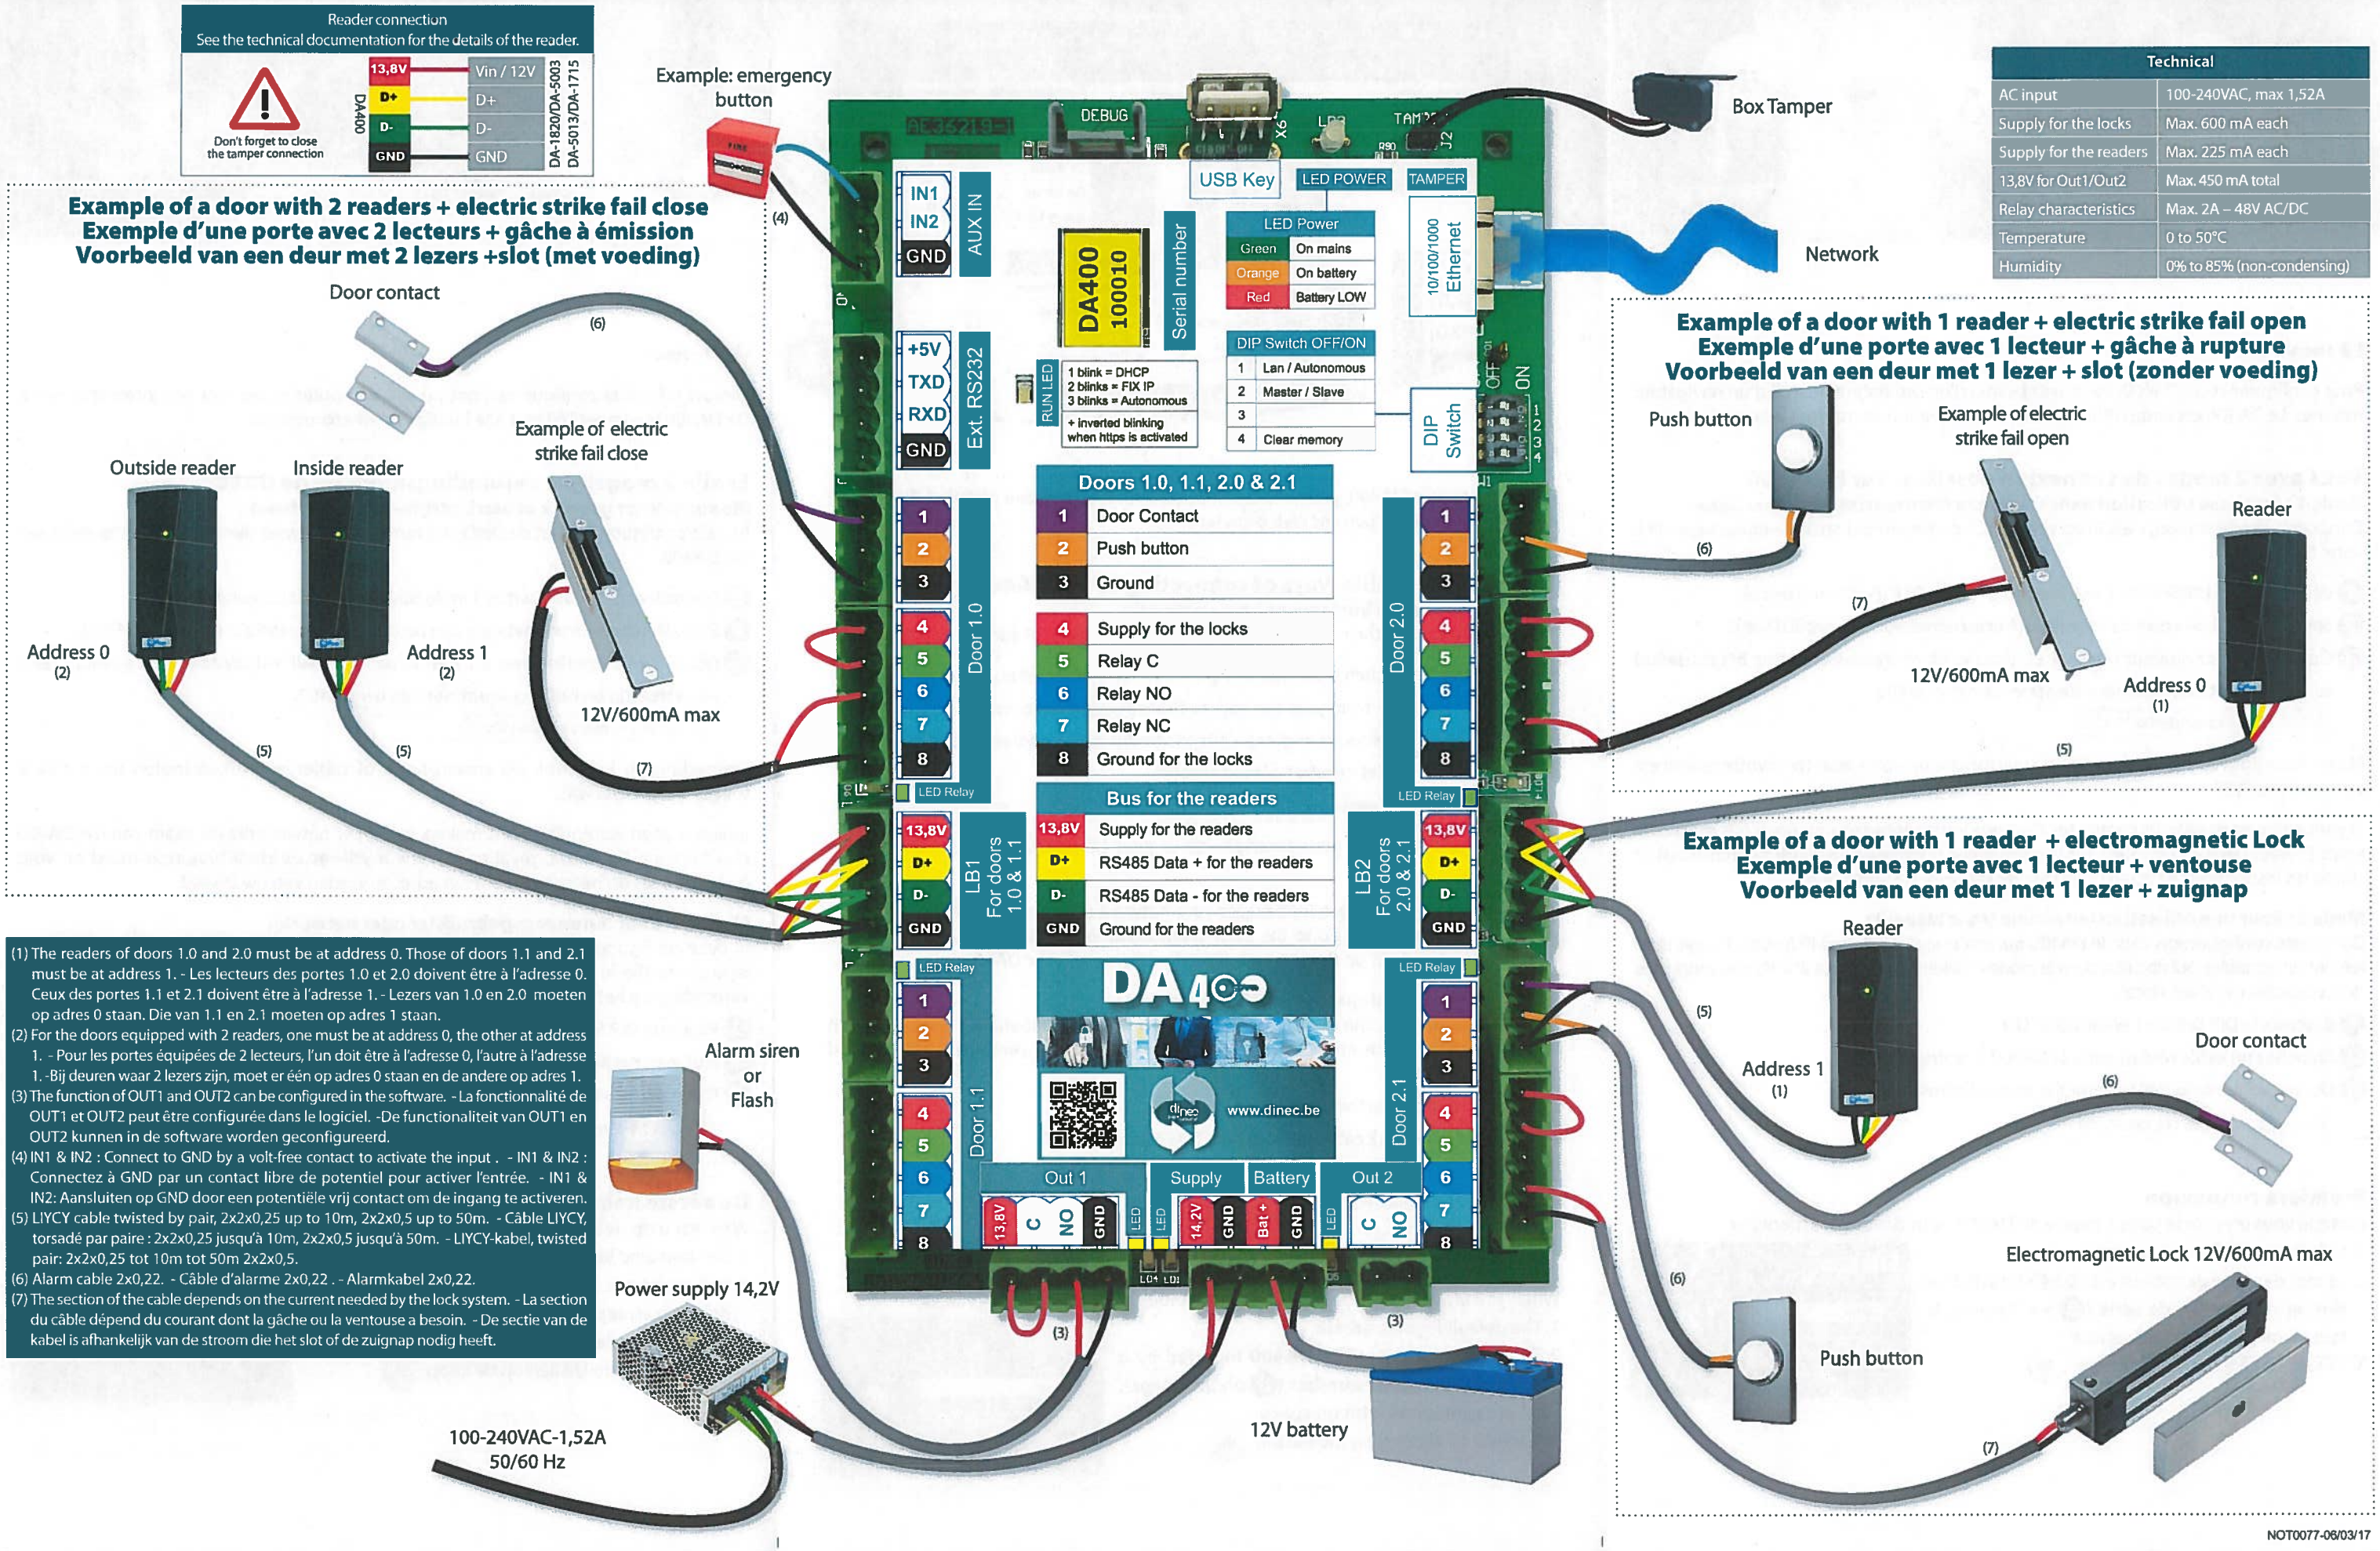

Technical	
AC input	100-240VAC, max 1,52A
Supply for the locks	Max. 600 mA each
Supply for the readers	Max. 225 mA each
13,8V for Out1/Out2	Max. 450 mA total
Relay characteristics	Max. 2A – 48V AC/DC
Temperature	0 to 50°C
Humidity	0% to 85% (non-condensing)

(1) The readers of doors 1.0 and 2.0 must be at address 0. Those of doors 1.1 and 2.1 must be at address 1. - Les lecteurs des portes 1.0 et 2.0 doivent être à l'adresse 0. Ceux des portes 1.1 et 2.1 doivent être à l'adresse 1. - Lezers van 1.0 en 2.0 moeten op adres 0 staan. Die van 1.1 en 2.1 moeten op adres 1 staan.
(2) For the doors equipped with 2 readers, one must be at address 0, the other at address 1. - Pour les portes équipées de 2 lecteurs, l'un doit être à l'adresse 0, l'autre à l'adresse 1. -Bij deuren waar 2 lezers zijn, moet er één op adres 0 staan en de andere op adres 1.
(3) The function of OUT1 and OUT2 can be configured in the software. - La fonctionnalité de OUT1 et OUT2 peut être configurée dans le logiciel. -De functionaliteit van OUT1 en OUT2 kunnen in de software worden geconfigureerd.
(4) IN1 & IN2 : Connect to GND by a volt-free contact to activate the input . - IN1 & IN2 : Connectez à GND par un contact libre de potentiel pour activer l'entrée. - IN1 & IN2: Aansluiten op GND door een potentiële vrij contact om de ingang te activeren.
(5) LIYCY cable twisted by pair, 2x2x0,25 up to 10m, 2x2x0,5 up to 50m. - Câble LIYCY, torsadé par paire : 2x2x0,25 jusqu'à 10m, 2x2x0,5 jusqu'à 50m. - LIYCY-kabel, twisted pair: 2x2x0,25 tot 10m tot 50m 2x2x0,5.
(6) Alarm cable 2x0,22. - Câble d'alarme 2x0,22 . - Alarmkabel 2x0,22.
(7) The section of the cable depends on the current needed by the lock system. - La section du câble dépend du courant dont la gâche ou la ventouse a besoin. - De sectie van de kabel is afhankelijk van de stroom die het slot of de zuignap nodig heeft.