

ACT5, ACT5-EM & ACT10

Digital Keypads



ACT5



ACT5-EM




ACT10

Introduction ACT5 and ACT5-EM keypads:

The ACT5 and ACT5-EM digital keypads are simple to use and easy to install standalone access control products.

Each keypad is contained in a stylish polycarbonate housing, with stainless steel keys and potted electronics, allowing for indoor and outdoor installation.

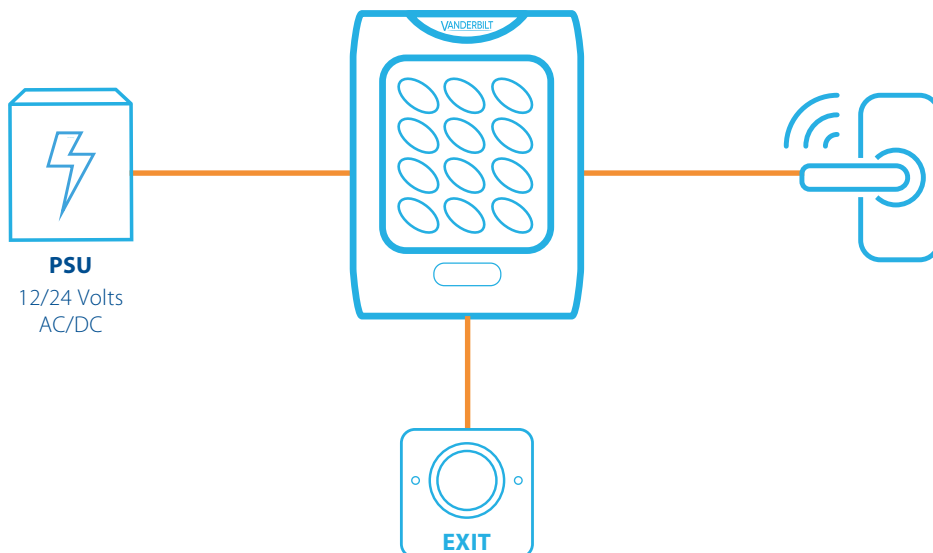

VANDERBILT

A-100609_EN


Edition date: 26-05-2020

ACT5, ACT5-EM & ACT10

Digital Keypads

Introduction ACT10:

The ACT10 digital keypad is a sturdy and durable unit made from vandal resistant die cast zinc with backlit stainless steel keys. This multi-purpose keypad caters for access control, door monitoring and interlock applications.

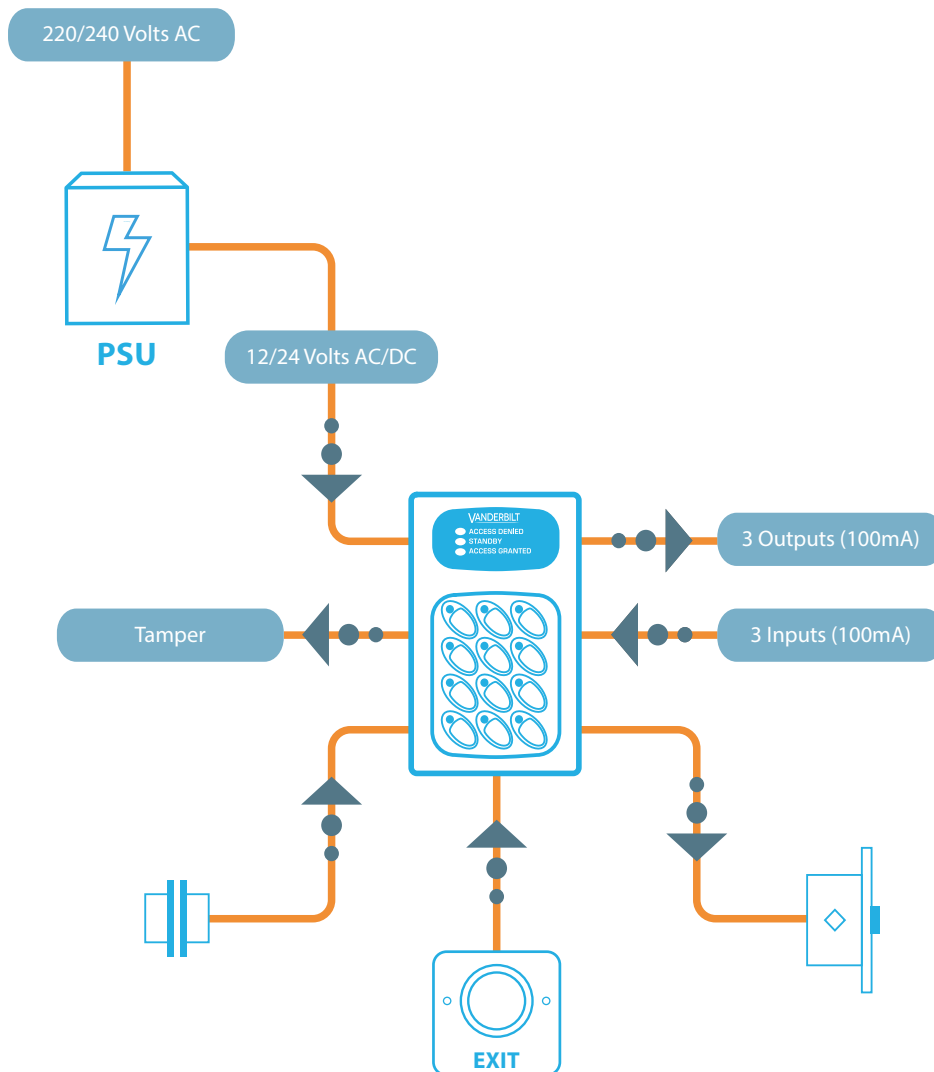

ACT5 features:

- 10 User Codes
- Keypad Backlighting
- Incorrect code lockout
- 5 amp door relay output

ACT5-EM features:

- 128 PIN Code and Credential (works with ACTpro_ISO-B or ACTprox_Fob-B)
- Keypad Backlighting
- Incorrect Code Lockout
- 5 amp door relay output

ACT10 features:

- 10 User codes
- 2 Output relays
- 2 doors, 2 user groups
- Interlock, re alarm input, door monitoring
- Surface or Flush mount options
- Indoor or outdoor (IP54)
- Zinc diecast housing, stainless steel keys
- Front and back tamper
- Backlit keypad

VANDERBILT

A-100609_EN

Edition date: 26-05-2020

ACT5, ACT5-EM & ACT10

Digital Keypads

Products Comparison	ACT5	ACT5-EM	ACT10
Doors	1	1	2
Users	10	128	10
User Groups			2
Pin Only	✓	✓	✓
Keypad Backlighting	✓	✓	✓
Push to exit	✓	✓	✓
Door Monitoring			✓
Fire Alarm Override			✓
Interlock			✓
Toggle Mode	✓	✓	✓
Door Relay Output	5 amp	5 amp	5 amp
Programmable Inputs			2
Programmable Outputs			2
Tamper Output			✓
12-24 volt DC or AC Input	✓	✓	✓
IP Rating	IP55	IP55	IP55
Door Forced / Door Ajar			✓
Change Relay Timer	✓	✓	✓
Duress Code			✓

Product Specification	ACT5	ACT5-EM	ACT10
Operating Voltage	12 to 24 Volts AC or DC		
Current Consumption	30mA (nominal) 120 mA (max)	60mA (nominal) 100mA (max)	40mA (nominal) 120mA (max)
Operating Temperature	-40°C to +70°C		
Door Open Time	0 - 255 seconds		
Relay Contact Rating	5A / 250 Vac		
Weight	225g		700g
Dimensions (H x W x D, mm)	94 x 130 x 25		138 x 87 x 37
Mounting	Surface / flush		
Installation	Indoor / outdoor		

Order Information			
Type	Art. No	Description	Weight*
ACT5	V54521-C110-A100	ACT5 Codelock - 1 Door, 10 Codes	0.31kg
ACT10	V54521-C112-A100	ACT10 Codelock - 2Doors,10Codes,2Groups	0.72kg
ACT5-EM	V54521-C111-A100	ACT5-EM Prox Reader w keypad - 128 Codes	0.41kg

*Total weight of the product inclusive of the weight of its accessories and packaging.

an **ACRE**
brand

vanderbiltindustries.com

 @VanderbiltInd

 Vanderbilt Industries

Vanderbilt International Ltd.

Clonsaugh Business and Technology Park

Clonsaugh, Dublin D17 KV 84, Ireland

 +353 1 437 2560