



#### PRODUCT CODES

**GJD500** D-TECT Laser 25m x 25m Black

**GJD500/W** D-TECT Laser 25m x 25m White

**GJD505** D-TECT Laser 5m x 5m Black

**GJD505/W** D-TECT Laser 5m x 5m White

**GJD509** D-TECT Laser 10m x 10m Black

**GJD509/W** D-TECT Laser 10m x 10m White

#### UNIQUE FEATURES

Covert operation: the LED display can be switched off with the remote control

4 adjustable sensing curtains to provide alarm & pre-alarm warning

High immunity to environmental interference using dedicated time of flight software

#### END USER BENEFITS

Capacity to detect or ignore objects with a remission factor down to 2%

Discreet design with optional black or white housing

IP65 rated, indoor and outdoor applications

Extremely reliable detection

## D-TECT Laser

The D-TECT LASER is a laser based security/safety device designed to protect goods and buildings against theft, vandalism and intrusion or to allow for the safe operation of industrial doors. This high-precision sensor ensures reliable and accurate motion detection.


#### APPLICATIONS

- Protection against theft and vandalism
- Perimeter protection / intrusion detection
- Protection of works of art and masterpieces in museums
- Protection and safety of industrial doors

#### EASE OF INSTALLATION

- 3 visible red LASER beams can be activated to align the detection surface and adjust the tilt and rotation angles
- Teach-in function: self-learning of both environment and background through an automatic adjustment of the detection planes
- Remote control to easily set the adjustable parameters

#### DIMENSIONS

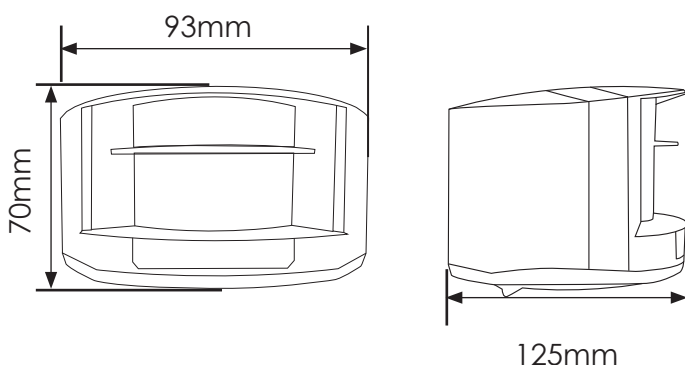

#### SECTORS



RESIDENTIAL



COMMERCIAL



INDUSTRIAL



BORDERS



MILITARY BASES



PORTS



POWER PLANTS



HERITAGE



AIRPORTS





PRISONS

# TECHNICAL SPECIFICATIONS



## ACCESSORIES

<b>GJD511</b>	Laser Bracket
<b>GJD501</b>	Laser Programmer

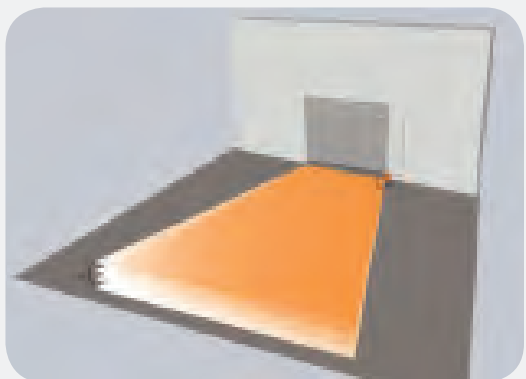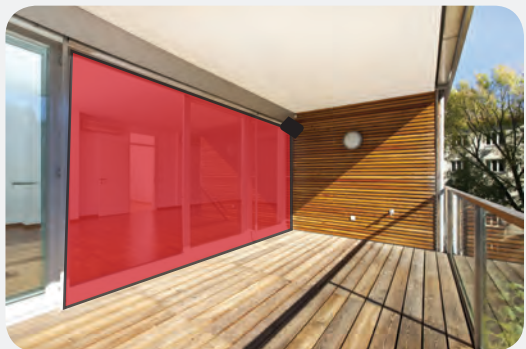

TECHNOLOGY	Laser scanner, time-of-flight measurement
DETECTION MODE	Movement and presence
MAX. DETECTION RANGE	GJD500: 25m x 25m GJD509: 10m x 10m GJD505: 5.0 x 5.0m
ANGULAR RESOLUTION	0.3516°
REMISSION FACTOR	>2%
TYP. MIN.TARGET SIZE	2.1cm @ 3m / 3.5cm @ 5m / 7cm @ 10m / 17.5cm @ 25m (in proportion to object distance)
EMISSION CHARACTERISTICS IR LASER	Wavelength 905 nm; max. output pulse power 75W (Class 1)
RED VISIBLE LASER	Wavelength 650 nm; max. output CW power 3mW (Class 3R)
SUPPLY VOLTAGE	10-35V DC @ sensor terminal
CABLE LENGTH	10m
POWER CONSUMPTION	< 5 W
RESPONSE TIME	Typ. 20 ms; max. 80 ms
OUTPUT MAX SWITCHING VOLTAGE MAX SWITCHING CURRENT	2 electronic relays (galvanic isolated – polarity free) 5V DC / 24V AC 80mA (resistive)
LED SIGNALS	1 blue LED: power-on status, 1 orange LED: error status, 2 bicoloured LED's: detection/output status (green: no detection, red: detection.) The LED's can be switched off by remote control
DIMENSIONS	125 mm (D) x 93 mm (W) x 70 mm (H) (mounting bracket + 14 mm)
MATERIAL	PC/ASA (colour: black or white)
ROTATION ANGLES ON BRACKET	-5° to +5° (lockable)
TILT ANGLES ON BRACKET	-3° to +3°
PROTECTION DEGREE	IP65 (avoid direct exposure to high pressure cleaning)
TEMPERATURE RANGE	-30°C to +60°C if powered / -10°C to +60°C unpowered
HUMIDITY	0-95% non-condensing
VIBRATIONS	< 2 G
NORM CONFORMITY	2006/95/EC: LVD; 2002/95/EC: RoHS; 2004/108/EC: EMC; EN 60529:2001, IEC 60825-1:2007 Laser Class 1 & 3R; EN 61000-6-2:2005 EMC – Industrial level; EN 61000-6-3:2006 EMC – Commercial level

## BEAM COVERAGE

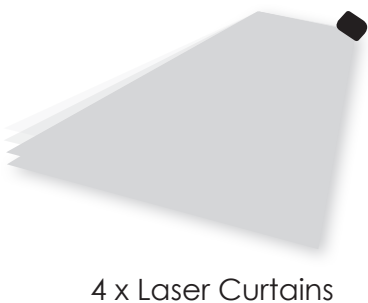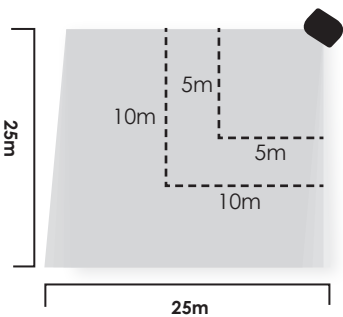

4 x Laser Curtains

Please note GJD reserve the right to change the information within this document, without notice.

