

# DIVA



IP42-IP65








**inim**  
ELECTRONICS

EN 60598-2-22; EN 60598-1; EN 62031; EN 62778; EN 61347-2-13;  
EN 61347-2-7; EN 55015; EN 61547; EN 61000-3-2; EN 61000-3-3

cod. HPDVSE110242 - HPDVSE180142  
HPDVLA180042 - HPDVLA240042

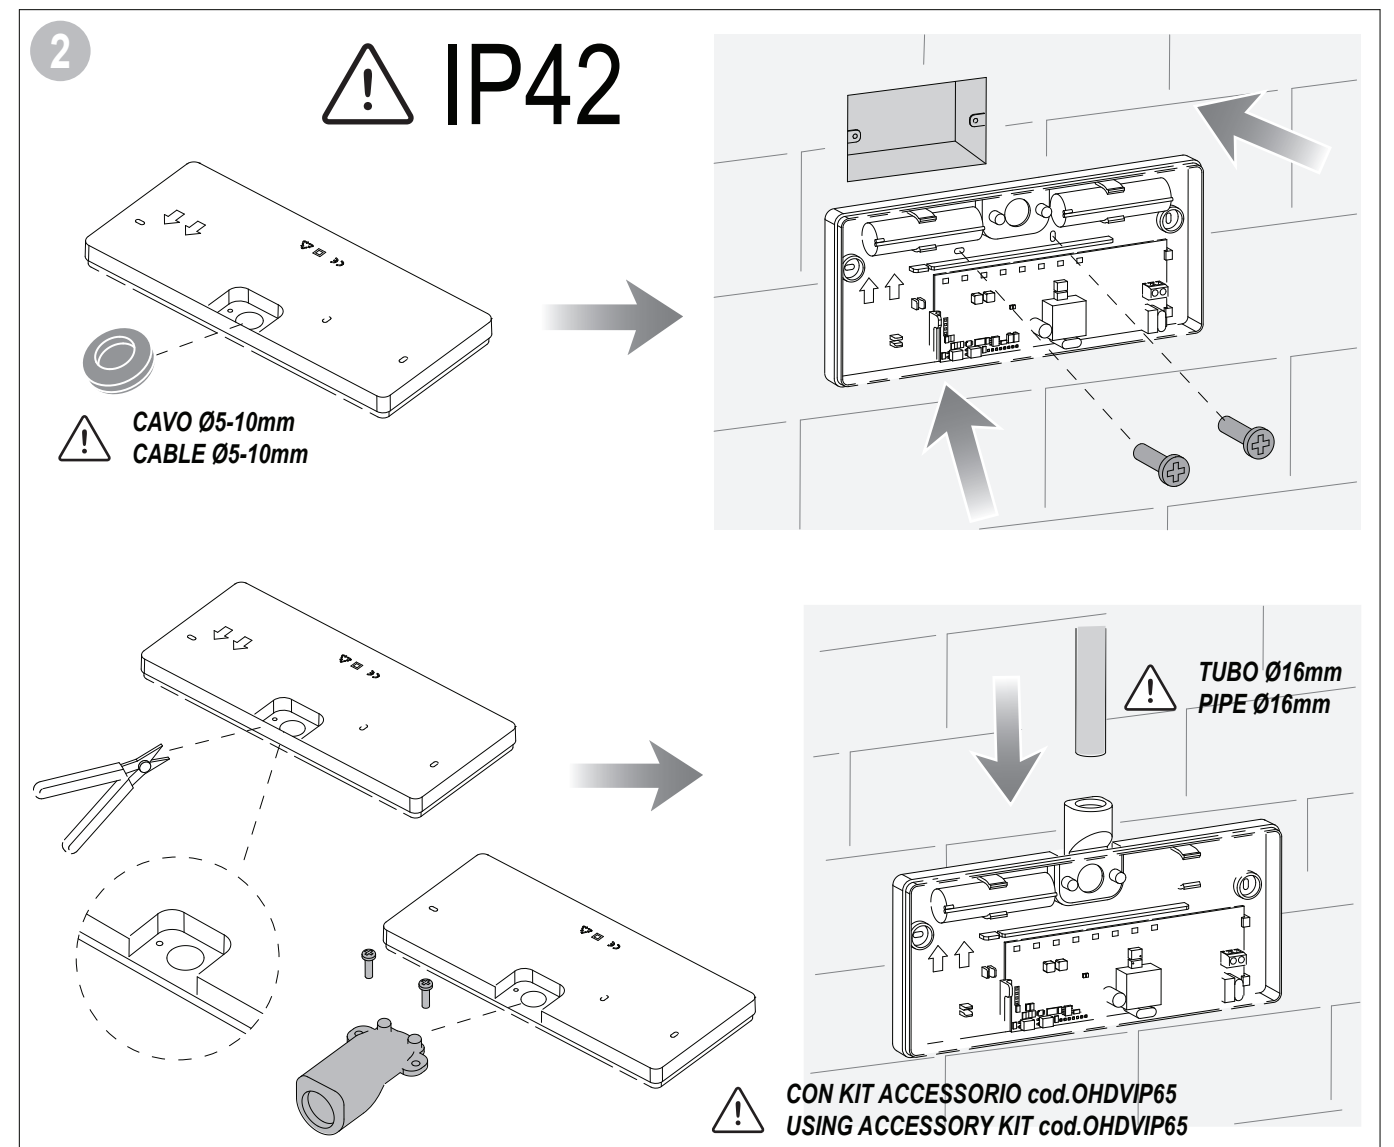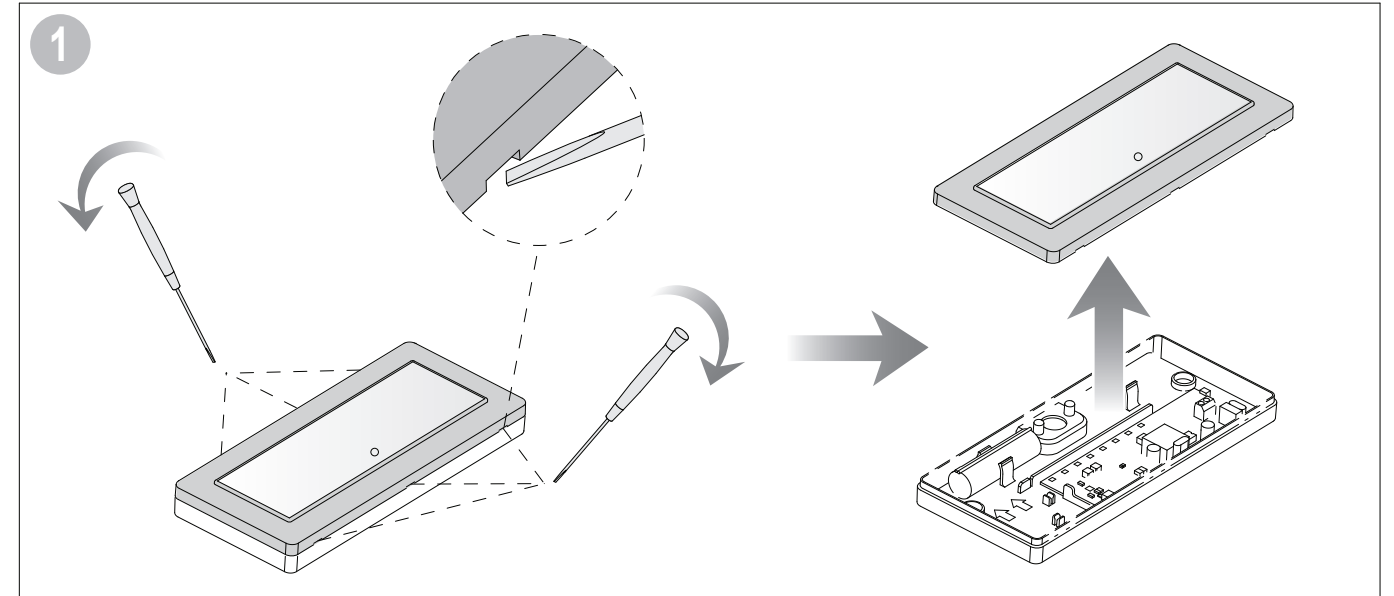

DCGIINIEHPDVSELA-R100

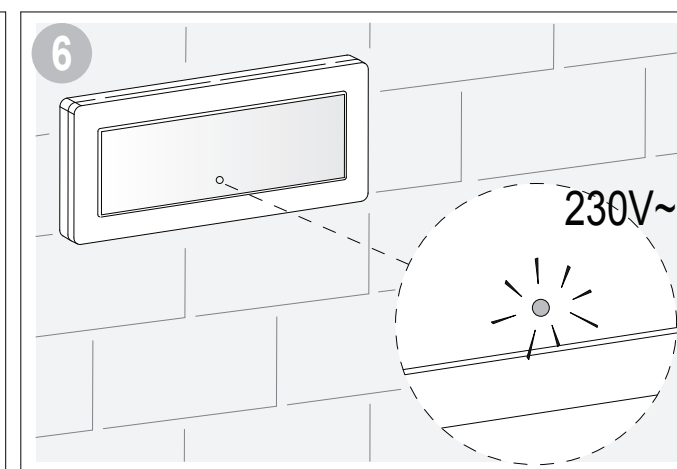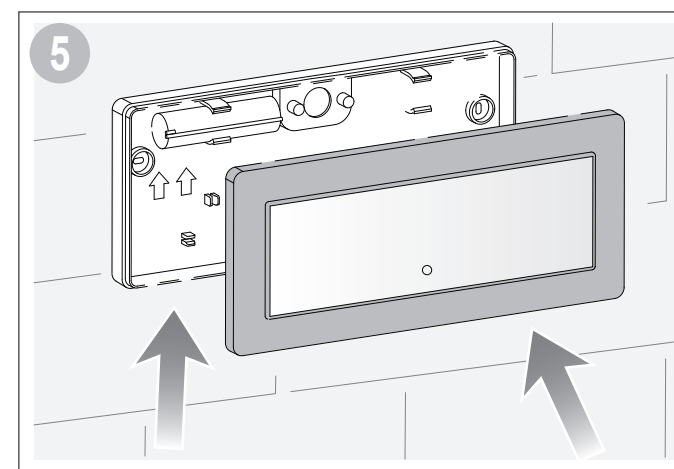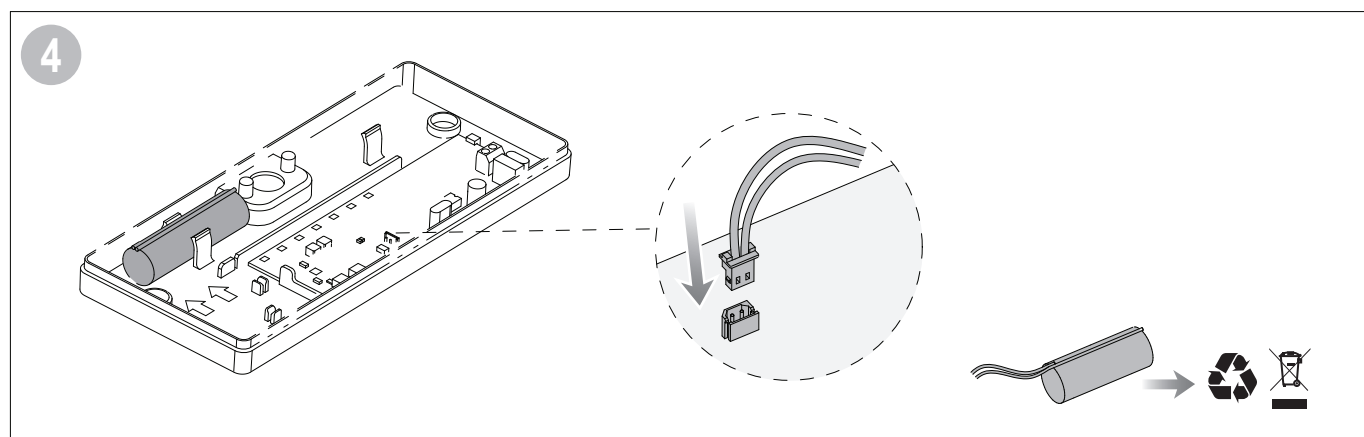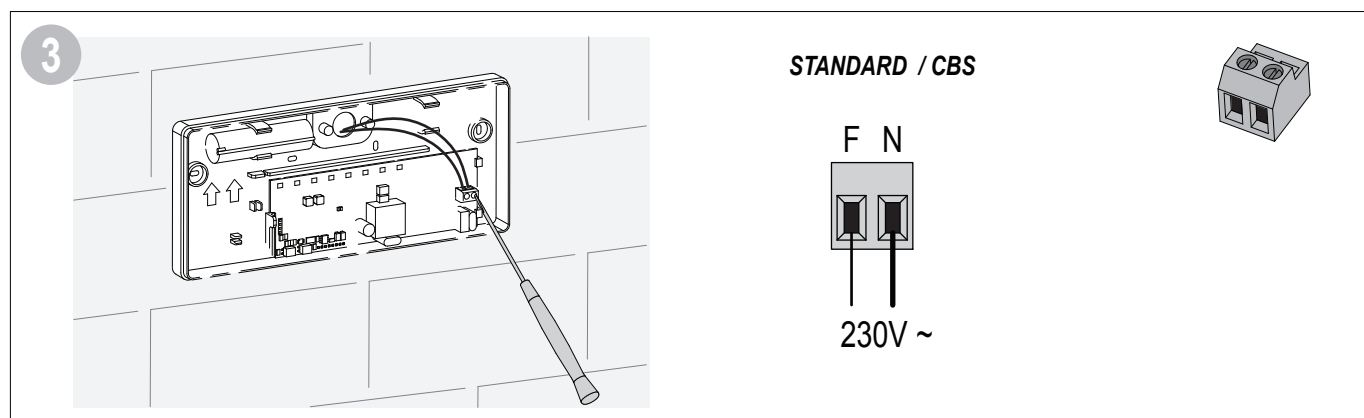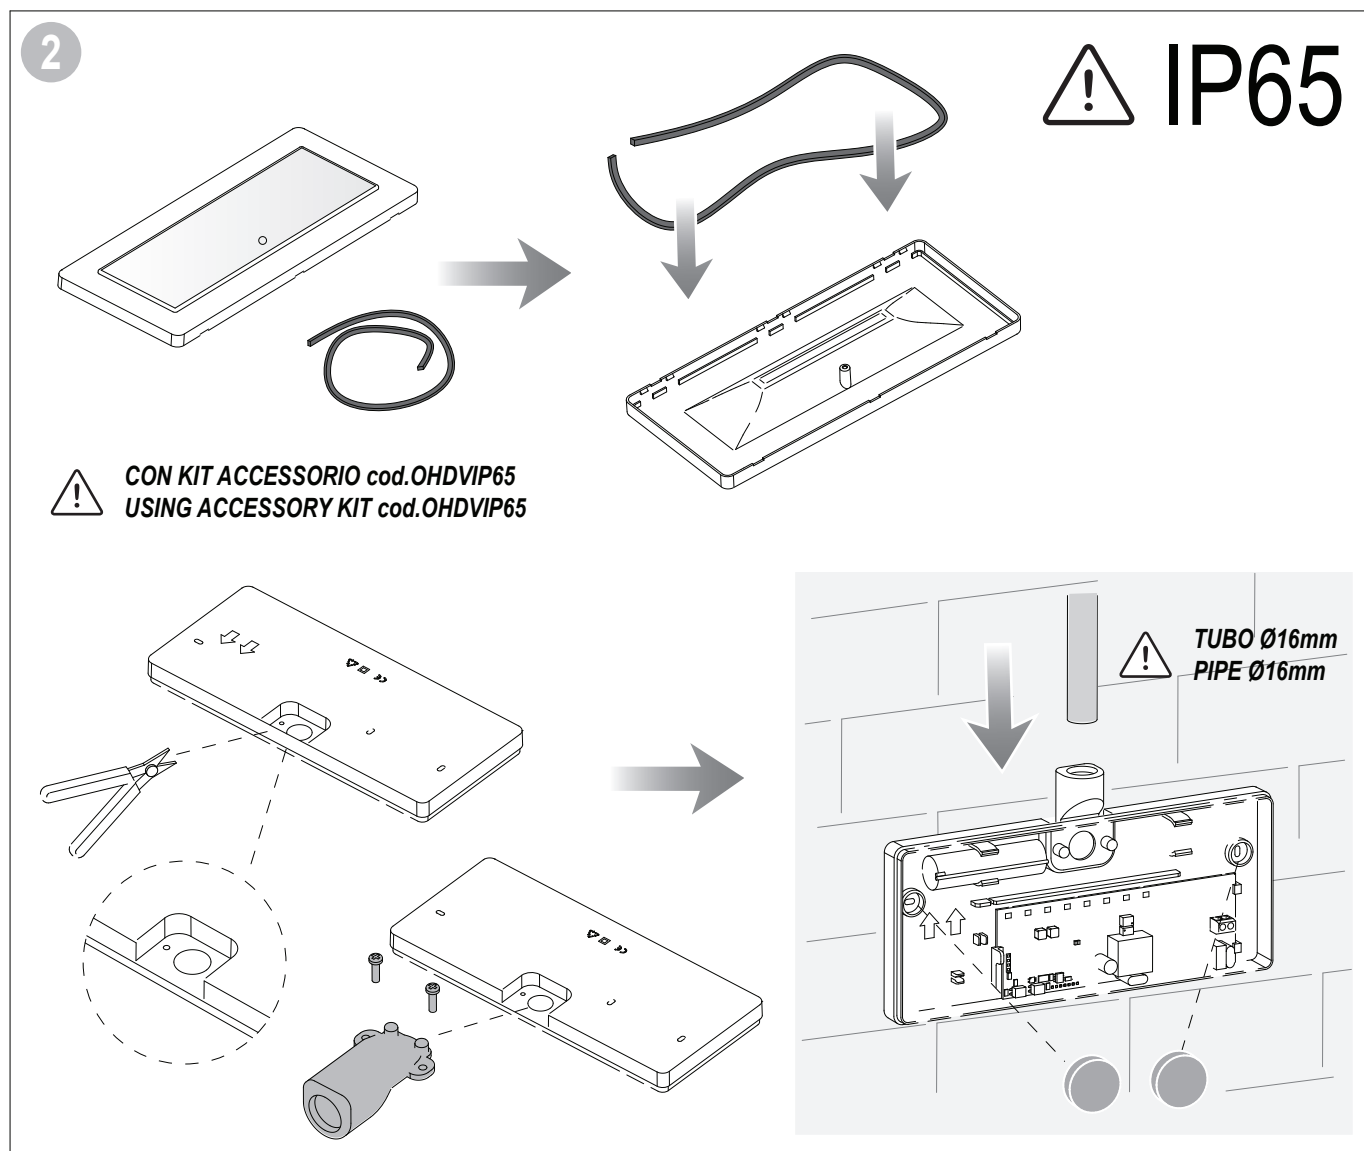

### I AVVERTENZE

- La sorgente luminosa è di tipo LED non sostituibile.
- Temperatura di funzionamento da 0° a 40°C.
- Sostituire la batteria quando non si raggiunge l'autonomia nominale dopo il corrispondente periodo di ricarica.
- Per l'eventuale sostituzione di batterie o altre riparazioni, rivolgersi ad un centro di assistenza tecnica autorizzato e richiedere l'utilizzo di ricambi originali. Il mancato rispetto di quanto sopra può compromettere la sicurezza dell'apparecchio.
- Il prodotto contiene batterie ricaricabili LiFePO<sub>4</sub> che devono essere smaltite negli appositi cassonetti.

### GB WARNING

- The light source is a non-replaceable LED.
- Operating temperature 0° to 40°C.
- Replace the battery when the nominal power is not reached after the corresponding charging period.
- For eventual replacement of batteries or any other repairs, contact an authorized service centre for assistance and request the use of original spare parts. Failure to comply with this recommendation could affect device safety.
- The product contains LiFePO<sub>4</sub> rechargeable batteries that must be disposed of in the appropriate bins.

#### Solo per versioni STANDARD

#### SEGNALAZIONI LED

VERDE FISSO: Batteria in ricarica  
ROSSO FISSO: Batteria scollegata

#### For STANDARD versions only

#### LED SIGNALS

SOLID GREEN: Battery charging  
SOLID RED: Battery disconnected.

|                 | 230V<br>50Hz | COSφ |       |      | LiFePO <sub>4</sub> | Maintained<br>Non-Maint. | Im<br>Non-Maint. | Im<br>Maintained | IP |     |
|-----------------|--------------|------|-------|------|---------------------|--------------------------|------------------|------------------|----|-----|
| HPDV S E 110242 | 120mA        | 0,06 | 5 LED | 2h   | 3,2V 1,5Ah          | N/M                      | 180              | -                | 42 | 12h |
| HPDV S E 180142 | 120mA        | 0,06 | 9 LED | 1,5h | 3,2V 1,5Ah          | N/M                      | 320              | -                | 42 | 12h |
| HPDV L A 180042 | 15mA         | 0,65 | 9 LED | -    | -                   | -                        | -                | 320              | 42 | -   |
| HPDV L A 240042 | 30mA         | 0,65 | 9 LED | -    | -                   | -                        | -                | 400              | 42 | -   |