







GEMMA



IP20    

inim
ELECTRONICS

EN 60598-1, EN 60598-2-2, EN 60598-2-22, EN 55015, EN 61547

cod. HPGMSE0A0320-B - HPGMSE0C0320-B - HPGMSE0M0320-B

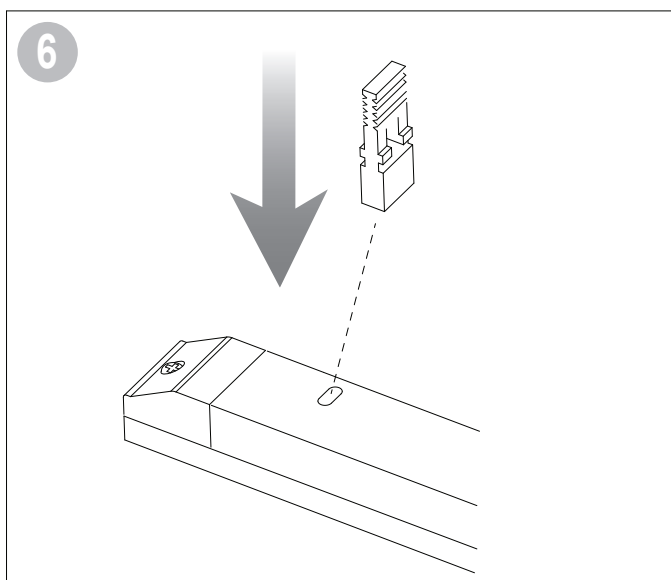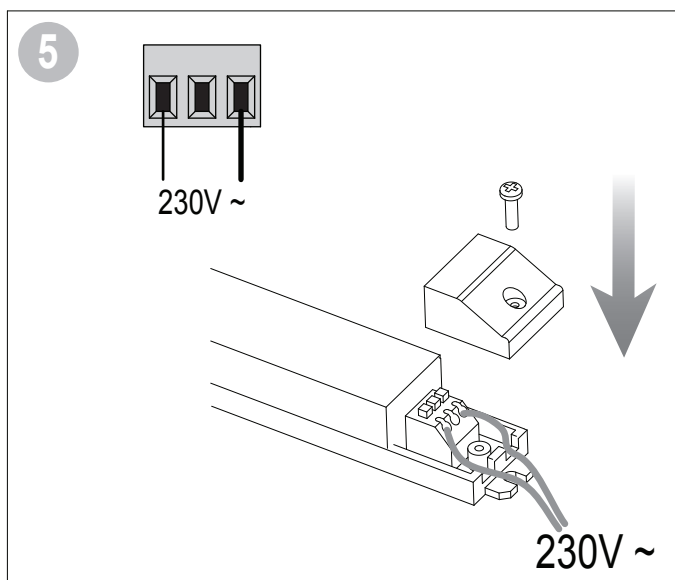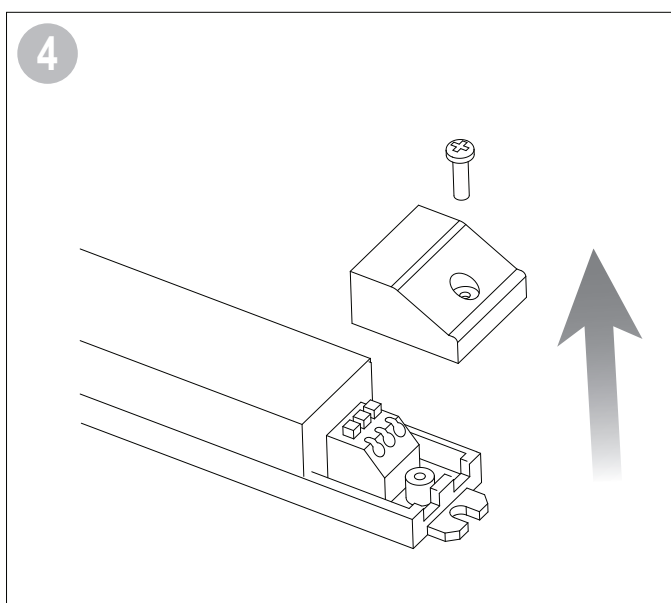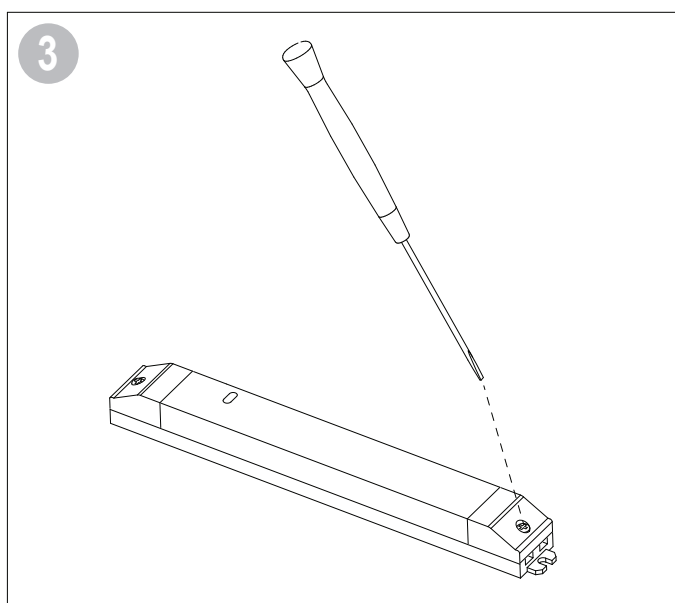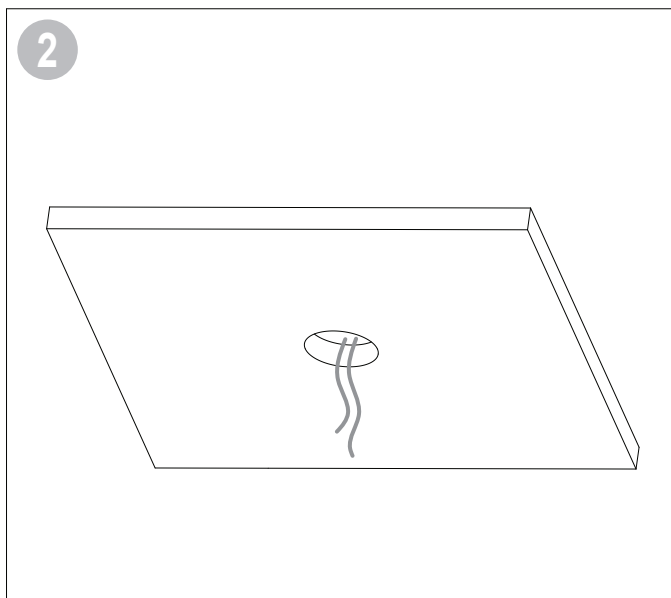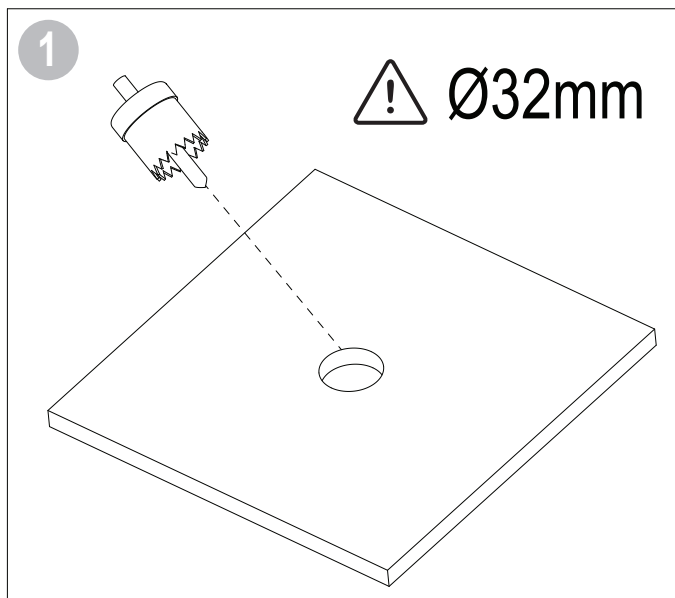

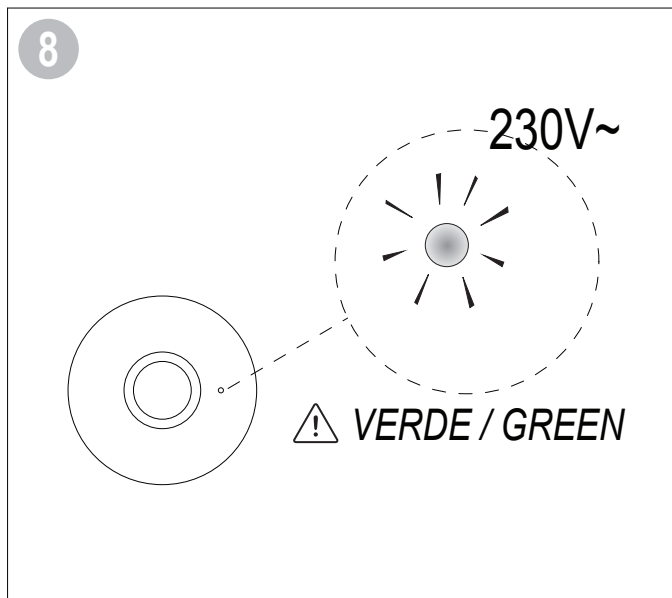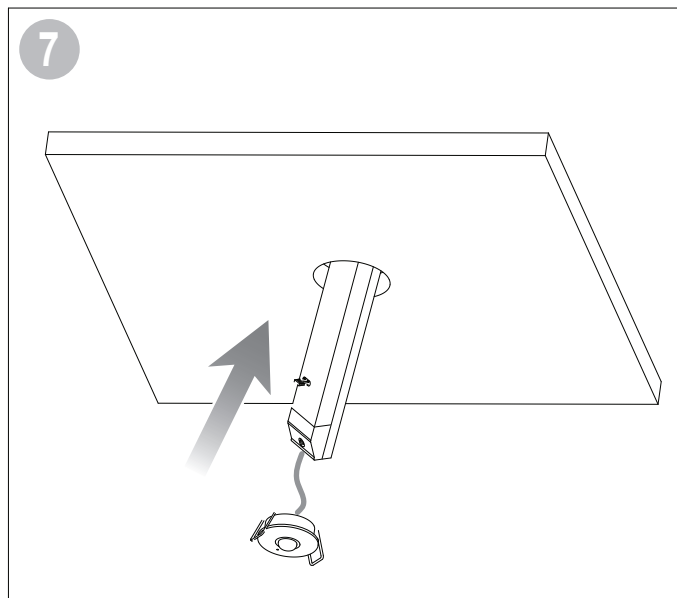

I AVVERTENZE

- La sorgente luminosa è di tipo LED non sostituibile.
- Temperatura di funzionamento da 0° a 50°C.
- Non puntare il fascio luminoso direttamente verso gli occhi.
- Il prodotto contiene una batteria ricaricabile LiFePO₄ non sostituibile.
- Il prodotto contiene batterie ricaricabili LiFePO₄ che devono essere smaltite negli appositi cassonetti.

SEGNALAZIONI LED

VERDE FISSO: presenza rete elettrica 230 V~.



GB WARNING

- The light source is a non-replaceable LED.
- Operating temperature 0° to 50°C.
- Do not point the light beam directly into the eyes.
- The product contains a rechargeable LiFePO₄ battery non-replaceable.
- The product contains rechargeable LiFePO₄ batteries that must be disposed of in appropriate bins.



LED SIGNALS

SOLID GREEN: presence 230 V~ mains.



HPGMSE0A0320-B

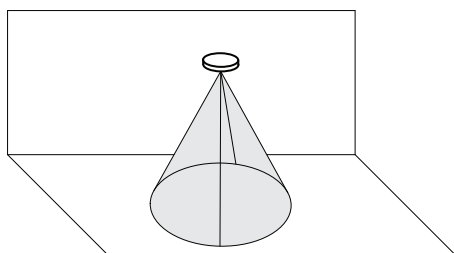

HPGMSE0C0320-B

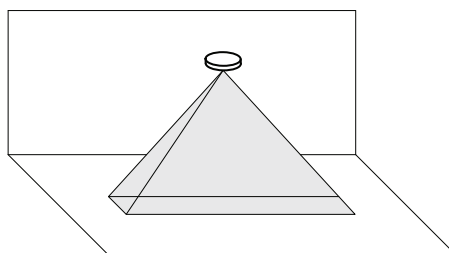

HPGMSE0M0320-B



		Potenza Power			Maintained Non-Maint.	lm Non-Maint.	IP	
HPGMSE0A0320-B	Area aperta Antipanic area	1,5 W	3 h	3,2 V - 1,5 Ah	N/M	150	20	12 h
HPGMSE0C0320-B	Via di esodo Escape route	1,5 W	3 h	3,2 V - 1,5 Ah	N/M	150	20	12 h
HPGMSE0M0320-B	Installazione a parete Wall installation	1,5 W	3 h	3,2 V - 1,5 Ah	N/M	150	20	12 h