

DS-6700HUHI SERIES TURBO HD ENCODER



Features and Functions

Video Input and Transmission

- Self-adaptive HDTVI/HDCVI/AHD/CVBS signal input
- Up to 5 MP HDTVI video input and live view
- Long distance transmission over UTP and coaxial cable

Compression and Recording

- H.265+/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264/MJPEG for the sub-stream of analog cameras
- Full channel recording at up to 5 MP resolution

Storage and Playback

- 1 Micro SD card slot (8G up to 128 GB capacity)
- Searching and playing back record files by camera number, recording type, start time, end time, etc.

Smart Function

• Supports line crossing detection, intrusion detection, sudden scene change detection, and audio exception detection

Network & Ethernet Access

- DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M self-adaptive Ethernet interface






Specifications

| Model | | DS-6701HUHI | DS-6704HUHI | | |
|-----------------------------|---------------------------|--|--|--|--|
| | Video input | 1-ch 4-ch | | | |
| Video/Audio input/output | HDTVI input | BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection 5MP, 4MP, 3MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 720p60, 720p50, 720p30, 720p25 | | | |
| | AHD input | 1080p25, 1080p30, 720p25, 720p30 | | | |
| | HDCVI input | 1080p25, 1080p30, 720p25, 720p30 | | | |
| | CVBS input | PAL/NTSC | | | |
| | Audio input | 1-ch, 3.5mm interface (2.0 Vp-p, 1 kΩ) (LINE IN) | 4-ch, RCA (2.0 Vp-p, 1 KΩ) | | |
| | Audio output | 1-ch, RCA (Linear, 1 KΩ) | 1-ch, RCA (Linear, 1 KΩ) | | |
| | Synchronous playback | 1-ch | 4-ch | | |
| | Video compression | MJPEG (sub-stream)/H.265+/H.265/H.264+/H.264 | | | |
| Video/Audio encoding | Audio compression | G.711u | | | |
| | Main stream | 5 MP/4 MP/ 3 MP/1080p/720p/WD1/4CIF/VGA/CIF | 5 MP/4 MP/ 3 MP/1080p/720p/WD1/4CIF/VGA/CIF | | |
| | Frame rate | Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N) | Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) | | |
| | Video bit rate | 32 Kbps to 10 Mbps | | | |
| | Audio bit rate | 64 Kbps | | | |
| | Dual stream | Support | | | |
| Network management | Network protocols | TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS, ONVIF profile S | | | |
| Storage | SD Card | 1 Micro SD card slot, support Micro SD card | | | |
| | Capacity | 8G Up to 128 GB | | | |
| External interface | Two-way audio input | 1-ch, RCA (2.0 Vp-p, 1 K Ω) (using the 1 st audio input) | | | |
| | Network interface | 1, RJ45 10M/100Mself-adaptive Ethernet interface | | | |
| | Serial interface | RS-485 (half-duplex); RS-232 | | | |
| | Alarm in/out | 1/1 | 4/2 | | |
| | Power supply | 12 VDC | | | |
| General | Consumption | ≤ 15W | | | |
| | Working temperature | -10 °C to +55 °C (+144 °F to +131 °F) | | | |
| | Working humidity | 10% to 90% | | | |
| | Dimensions (W × D × H) | 162.5 × 114 × 47.5 mm(6.4 × 4.5 × 1.9 inch) | | | |
| | Weight | ≤ 1.5 kg (3.3 lb) | | | |



Physical Interfaces

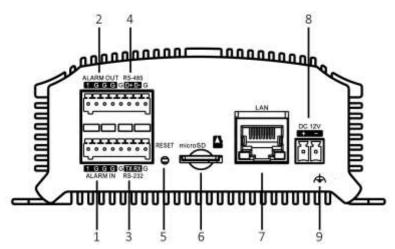

The rear panel of DS-6704HUHI provides 4 alarm in and 2 alarm out interfaces.

| Index | Description | Index | Description |
|-------|-----------------------------------|-------|-----------------------|
| 1 | Alarm In | 6 | Micro SD Card Slot |
| 2 | Alarm Out AUDIO IN, RCA Connector | 7 | LAN Network Interface |
| 3 | RS-232 Serial Interface | 8 | 12 VDC Power Input |
| 4 | RS-485 Serial Interface | 9 | GND |
| 5 | RESET | | |

Available Models

NOTE

DS-6701HUHI, DS-6704HUHI

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, Chica T+86-571-8807-5998 overseasbusiness@hikvision.com

T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T +61-2-8599-4233 salesau@hikvision.com

Hikvision lodia T+91-22-28469900 sales@pramahikvision.com

T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thaltand T +662-275-9949 sales.thaltand@hikvision.com Hikvision Europe 1 +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T+39-0438-6902 Info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Liifam.support@nikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvisior.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T+01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 [10] 0351172 sale.africa@hikvision.com

Hikvision France T + 331011-85-330-450 Info.fr@hikvision.com

Hikvision Kazakhstan T+7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T+971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 Info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hlkvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T+7-495-669-67-99 salaru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sates.Indonesia@hikvision.com

Hikvision Colombia sales colombia@hikvision.com