



tel.: +48 (58) 340 24 40  
 fax: +48 (58) 340 24 49  
 e-mail: [info@alarmtech.pl](mailto:info@alarmtech.pl)

Alarmtech Polska Sp. z o.o.  
 ul. Kielnińska 115  
 80-299 Gdansk-Osowa, Poland



## MC 240-S56

### MC 240-S56 SET: MAGNETIC REED & CONTACT IN ALUMINUM HOUSING

The MC 240-S56 is a special set designed for mounting on overhead doors, industrial type gates etc. at the floor level. It includes a magnetic reed MC 240-C enclosed in an MC 200-6 Al housing and an extra strong magnet in an MC 200-5 housing to allow contact actuation with wider gaps. The assembly installed on the floor can withstand weight of a car. The provided L-shaped angle mounting bracket allows easy on-door position adjustment of the magnet which helps in proper installation of the whole set. The MC 240-S45 set can be used with an **MC 200-T** armoured sleeving accessory.

#### TECHNICAL DATA

- Reed relay switch configuration: NC
- Contact rating: max. 200 V DC/peak AC/500 mA/10 VA
- Anti-tamper loop
- 6 m, 4 wire, white lead, VdS approved
- Magnet material: Alnico 5
- Approved by Techom, VdS, ANPI/NVBB and other European certification bureaus.

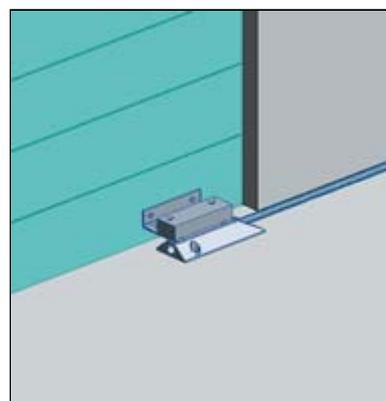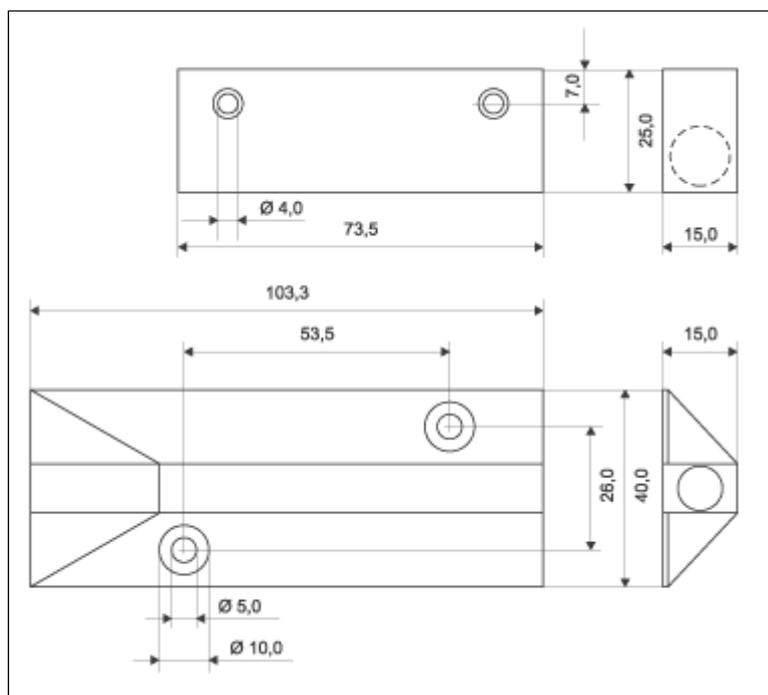

PRODUCT CODE	PRODUCT DESCRIPTION	GAP DISTANCE - WOOD	GAP DISTANCE - STEEL	PACKAGING
MC 240-S56	MC 240-C magnetic reed housed in the MC 200-6 + magnet housed in the MC 200-5 + angle mounting L-bracket + 6 m, white, 4 wire lead	39 mm	25 mm	1 set