



## Product data sheet


# UC240

## UltraSync Communicator with IP and 4G/2G dual path suitable for both fire and intrusion panels

### Overview

UC240 UltraSync Communicator is a dual path alarm signalling unit for transmitting alarm signals from a customer's alarm panel to a Central Monitoring Stations (CMS). The monitoring path is based on IP and SIM 4G/2G mobile technology. The unit is designed for use in both security and fire systems.

- Dual-path monitoring for low, medium and high risk sites, covering intruder applications, fire and more.
- These monitored alarm signalling devices are small enough to fit inside most alarm panels. They use two signalling paths – if the primary path is down, the secondary path kicks in. And if that happens, the secondary path will use the primary path reporting and polling times.
- The primary path uses IP technology to send alarm signals over the customer's network or broadband hub.
- The secondary path uses 4G or 2G mobile connectivity – with dual SIMs for extra resilience.

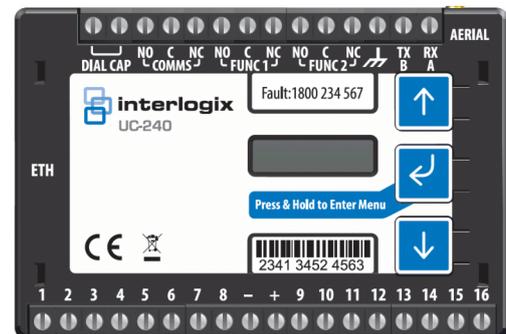

### Alarm panel interfaces

- 16 general purpose alarm inputs (Logic High = +2V to +30V/Logic Low = <1.3V)
- 3 relay outputs
- Unconnected state: Logic Low
- Standard screw terminals
- Programmable function output-for remote control of site devices
- Line fault output-for status indication at site of alarm signalling path
- Dial Capture with phone line simulation
- Onboard RS232 or RS485 for direct panel interface to some panels

### Dial Capture features

- Converts dialler alarm systems into high security signalling devices
- Alarm panel interface supports: Ademco Contact ID, Ademco Hi Speed, Ademco 4+1, Ademco 4+2, SIA 1/2/3

### Configuration

- Simple single push button pin learn
- iOS and Android installer app
- Using on board menu driven by push buttons

# UC240

## UltraSync Communicator with IP and 4G/2G dual path suitable for both fire and intrusion panels

### Technical specifications

---

#### General

---

Product line	UltraSync
--------------	-----------

---

#### Network

---

Communicator type	2G, 4G, Cellular, IP
GSM frequency	LTE: Penta-Band 700 (Bd28) / 800 (Bd20) / 900 (Bd8) / 1800 (Bd3) / 2100 MHz (Bd1) + GPRS Dual band (900/1800 MHz)

---

#### Reporting

---

Reporting protocols	Contact ID, SIA
---------------------	-----------------

---

Supported receivers	UltraSync
---------------------	-----------

---

#### Interfaces

---

Ethernet	RJ-45 1000 Mbps Ethernet Interface
----------	------------------------------------

---

Antenna	Yes, included
---------	---------------

---

#### Input/Output

---

Inputs	16 general purpose alarm inputs
--------	---------------------------------

---

Outputs	3 relay outputs
---------	-----------------

---

#### Electrical

---

Operating voltage	9.5V to 30V
-------------------	-------------

---

Current consumption	85mA @12V
---------------------	-----------

---

#### Physical

---

Physical dimensions	95 x 67 x 17 mm
---------------------	-----------------

---

Colour	Black
--------	-------

---

#### Environmental

---

Operating temperature	-10°C to +55°C
-----------------------	----------------

---

Relative humidity	5 to 75%
-------------------	----------

---

Environment	EN50130-5 ; Class II - Indoor (General)
-------------	---

---

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 2 November 2020 - 10:43

