

DIVA

Cod. DVAA180142

CE  IP42

Introduction

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 320 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 1 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description


Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Morsetti dedicati per le funzioni di <i>inibizione</i> e <i>modo di riposo</i>
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	320 lm
Lum. flux in Maintained mode	180 lm

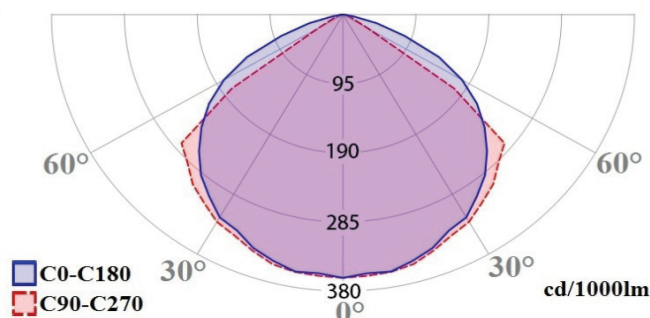

INIM ELECTRONICS s.r.l.

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz