

**MicroProx® Tag Proximity - 1391**

Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

☒ **1391 Base Model****Programming (Select one option)**

- ☐ **L** - Programmed, Low Frequency (125 kHz). Specify Programming Information.
☐ **N** - Non-Programmed, Low Frequency (125 kHz). Programming Information Not Required.

Front Packaging (Select one option)

- ☐ **S** - Gray with HID Standard Artwork
☐ **K** - Black with HID Standard Artwork
☐ **B** - Plain Black Finish, (No Artwork)
☐ **G** - Plain Gray Finish, (No Artwork)
☐ **C** - Custom Artwork - Specify Custom Artwork Number¹

Back Packaging³

- ☒ **S** - Adhesive Backing

Tag Numbering² (Select one option)


- ☐ **M** - Sequential Matching Encoded/Printed (Inkjetted)
☐ **N** - No Printed Tag Numbering
☐ **S** - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)
☐ **R** - Random Encoded/Non-Matching Sequential Printed (Inkjetted)

Slot Punch

- ☒ **N** - None

Optional Custom Artwork¹

☐ _____ (Specify Artwork Number - Refer to the Custom Artwork Forms for new Artwork)

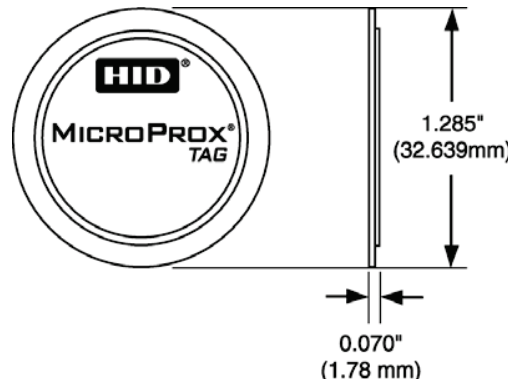

Enter your final Tag options from check boxes above. Example: 1391LKSMN

Final Part Number	1391			S		N	-	(Optional Artwork #)
--------------------------	-------------	--	--	----------	--	----------	---	-----------------------------

125 kHz Tag Programming Information

Format Number _____ (example: H10301) Bit Numbers _____ (example: 26 bit) Facility Code _____

Encoded Card # Start _____ Stop _____ Printed Card # Start _____ Stop _____

HID Elite ICE Number (if applicable) - _____ (Custom Format) Site Code _____ City Code _____ OEM Code _____

Special Instructions: _____

¹ For new artwork files, contact Customer Service for custom artwork number, lead-times, minimum order quantities, and cost.

² The Printed tag number is placed on the back of the tag.

³ The MicroProx Tag is not for use on cards that use full insertion or tractor feed type readers.

Do not adhere to metal surfaces. Metal shields the RF, making the tag inoperable. Due to variations in cards and reading devices, HID does not claim that the MicroProx Tag will work in every situation. Functional and non-functional MicroProx Tags are available for compatibility testing with existing credential and reader technologies. Compatibility should be confirmed prior to ordering.

MicroProx Placement