



2N Answering Units

Stylish indoor communicators for any apartment

ANSWERING UNITS

www.2n.cz

VERTICALS



Residential
Single house



Residential
Apartment building



Commercial
Office building

General overview

Part of the whole 2N IP door entry solution

- Talk to the visitors, see* them and open them a door

Reliability for a stress-free life of integrators

- Long life products without any maintenance needed

Developed with the focus on resident's privacy

- Our own OS** prevents eavesdropping on the conversation



* Not possible with 2N® Indoor Talk

** Except the 2N® Indoor Touch 2.0 – it has Android OS

General overview

Quick installation done within a minute

- One cable for both, the communication and power (PoE)

Remote configuration via My2N cloud


- Initial configuration can be done without any traveling on site

Luxury design combined with top quality materials

- Tempered glass protects indoor units against scratches

HD quality sound with ambient noise suppression


- Innovative speaker output for the excellent audio clarity

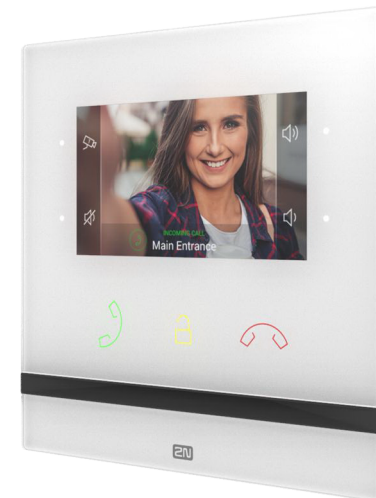

ANSWERING UNITS



**2N® Indoor
Talk**

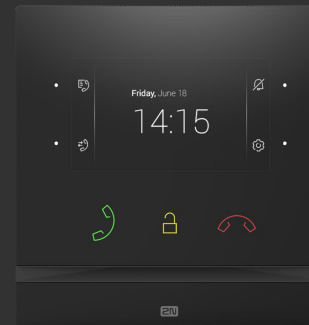

**2N® Indoor
Compact**




**2N® Indoor
View**




**2N® Indoor
Touch 2.0**

ANSWERING UNITS

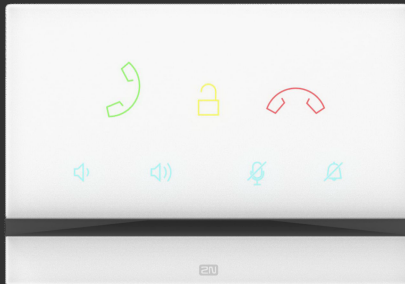

**2N® Indoor
Talk**



**2N® Indoor
Compact**



**2N® Indoor
View**



**2N® Indoor
Touch 2.0**



2N® Indoor Talk

- > More than a perfect quality sound experience
 - Crystal clear sound for intelligible communication
- Extension with a mobile app for flexibility and image
- Large backlit icons for easy control
- Different ringtones for calls from various devices
- Two door locks control from the unit (gate, garage)
- Hardened 3mm thick glass with an anti-scratch finish

2N® Indoor Compact

- Intuitive control for all age groups
 - HD High quality 4.3" display with touch buttons
 - HD audio ensuring a clear conversation
 - External camera support for better overview
 - Call log with a photo of the visitor
 - Connection with reception or the entry door
 - Overview of the video from the intercom






2N® Indoor View

- > Answering unit with full screen video
 - HD 7" touch display with HD resolution
 - Full screen video calls
 - Award-winning design
 - Residents' privacy in safe hands
 - First configuration from the comfort of your office
 - Produced and developed in Europe





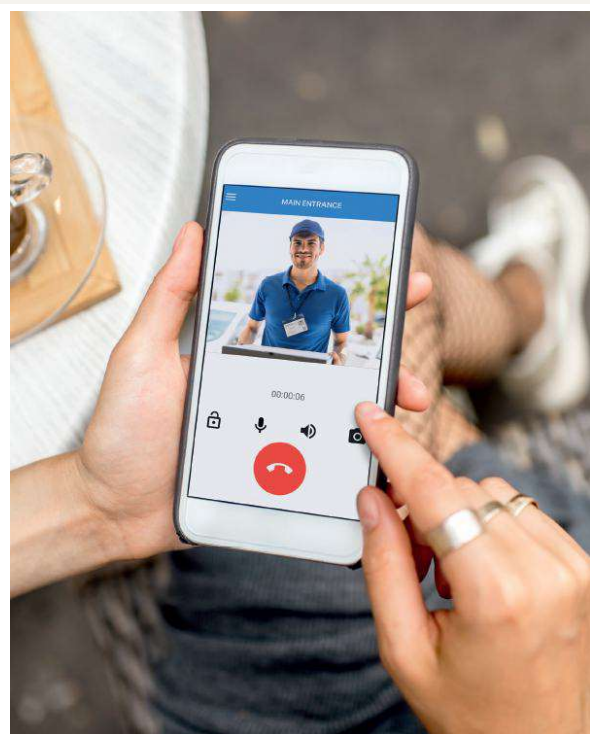

2N® Indoor Touch 2.0

- Multifunctional panel with Android OS
 - 🏠 Central element of a smart household
 - 👉 Simple control owing to the 7" display
 - 🤖 Open for third-party applications
 - 📶 Wi-Fi versions allowing wireless connection
 - 📶 Tilted display for great readability
 - 📺 Video recording for playing back missed calls






2N® Mobile Video

- > Keep up with visitors anywhere you are
 -  Video call from the intercom to your smartphone
 -  Opening a door even when you are not at home
 -  Video preview of the visitor before taking the call
 -  Missed-call logs with images of the visitor
 -  The most reliable cloud service on the market
 -  Mobile app instead of a physical answering unit

ANSWERING UNITS



Cost effective



Entry level audio



Mid level audio
and video




Cost effective
full screen



High end
Home Automation



CONNECTION TOPOLOGY

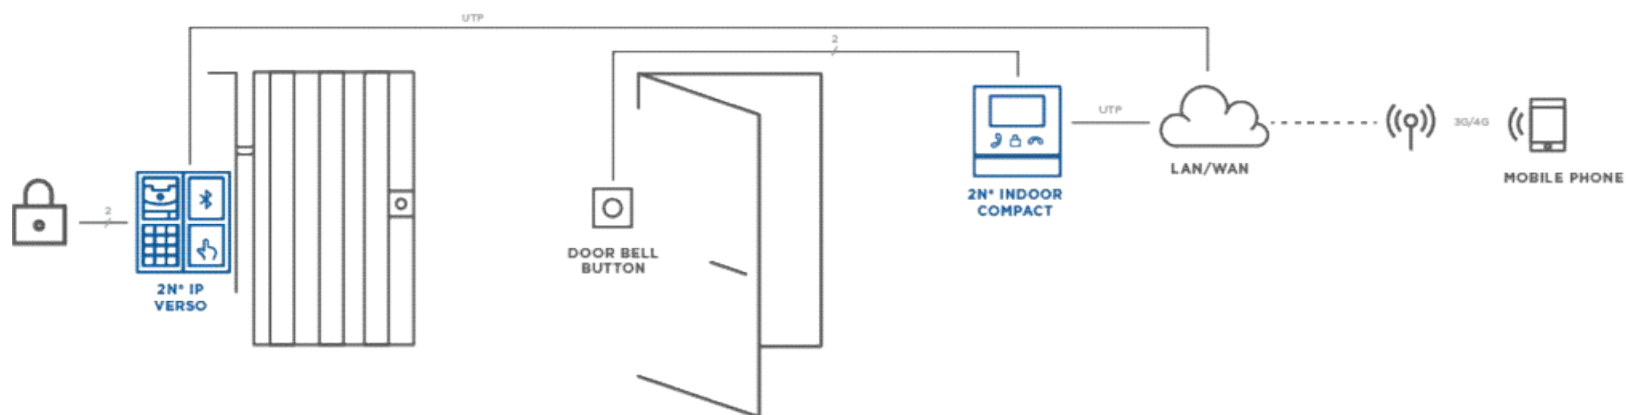

ORDER NUMBERS



2N® Indoor Touch 2.0
black
91378375
91378376 (WiFi)



2N® Indoor Touch 2.0
white
91378375WH
91378376WH (WiFi)



2N® Indoor View
black
91378601



2N® Indoor View
white
91378601WH


ORDER NUMBERS



2N® Indoor Compact
black
91378501




2N® Indoor Compact
white
91378501WH



2N® Indoor Talk
black
91378401



2N® Indoor Talk
white
91378401WH



2N® Mobile Video*

* [Pricing Policy](#)

www.2n.cz

PRODUCT ACCESSORIES



Stand for
2N® Indoor Touch 2.0

91378382 (black)
91378382W (white)



Flush mounted power supply
for 2N® Indoor Touch 2.0

91378380



Power adaptor for
2N® Indoor Touch 2.0

91378381E/GB/US



Stand for 2N® Indoor Talk,
Compact, View

91378382 (black)



2N Flush installation box for
2N® Indoor Talk, Compact, View

91378800
(mandatory accessory)

Technical Specification

Power Supply: PoE 802.3af or 12VDC +/-10% adaptor

Audio: integrated microphone, 2W speaker

- Codecs: G.711, G.722, G.729, L16/16kHz

Video:

- Codecs: H.264, H.263, MJPEG

Interfaces: touch display or capacitive touch buttons

- LAN: 10/100BaseT, RJ-45, Cat5e or higher
- Doorbell input: Switching contact (button/relay)
- Induction loop output: 600mV RMS

Operating temperature: 0 to 50°C





**Experience the broad portfolio of 2N indoor units...
and choose the one that fits the best to your project!**

ANSWERING UNITS

www.2n.cz
