



2N® Helios IP Solo

The Compact IP Intercom



IP INTERCOMS

www.2n.cz




VERTICALS



Office



Residential




OEM

Makes the entrance part of any Smart Home

- Video calls and door control integrated into your smart home system.



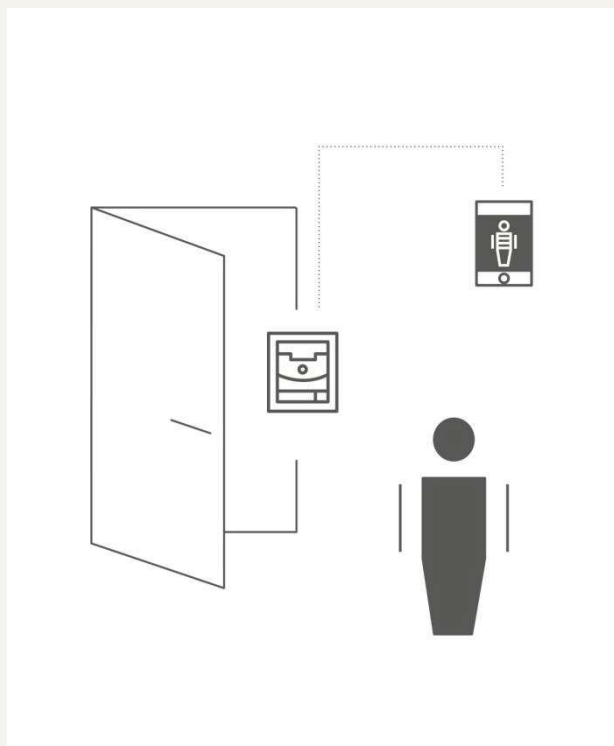


Sharp video day and night

- > A hidden camera produces sharp images with HD resolution and night-vision so you can see visitors clearly, even in the dark.

Stylish and durable

- A luxurious surface of brushed zinc represents any entrance in style. All components and materials are industrial high-grade so as to ensure excellent performance under any conditions.

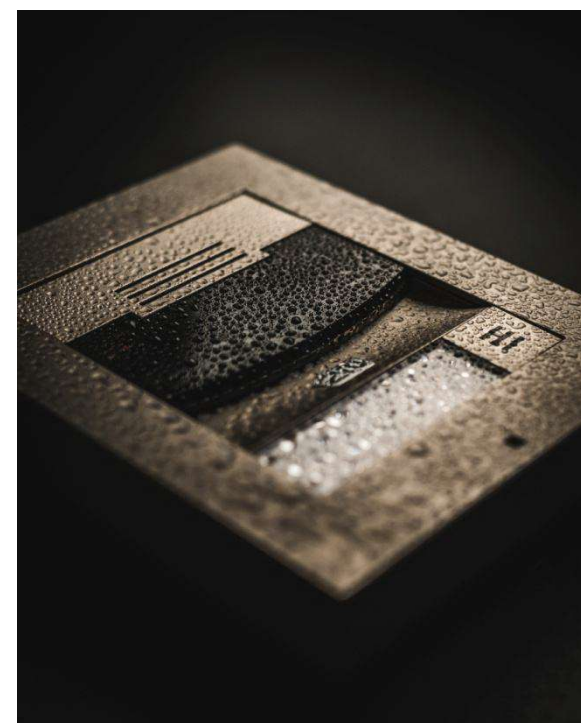




Integration

- > Various integration scenarios with a lot of Home Automation systems thanks to open HTTP API, Automation functionality in Helios IP and ONVIF support.

CONNECTION TOPOLOGY

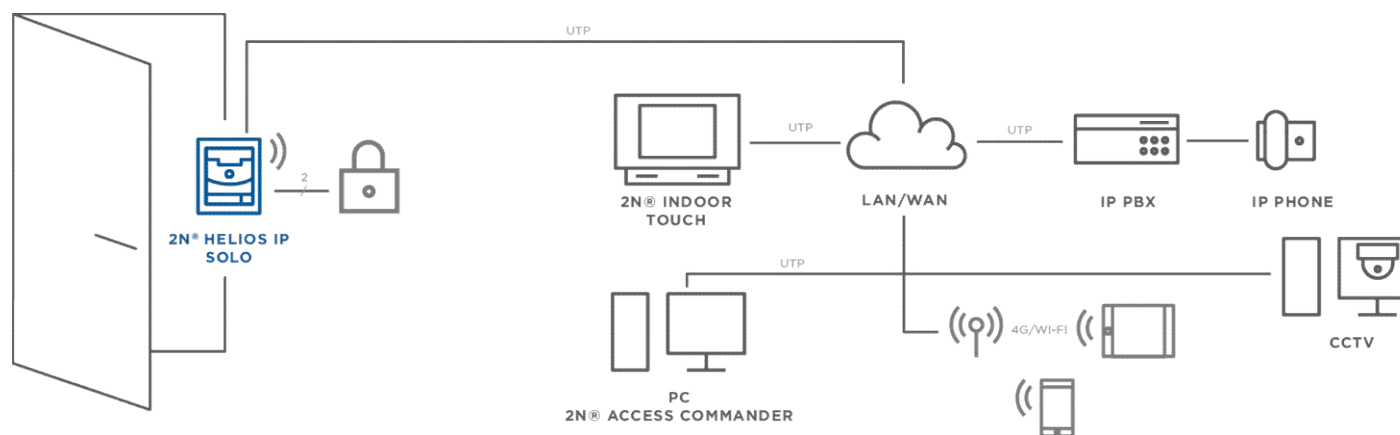



INTEGRATION WITH 3RD PARTY PRODUCTS



TELEPHONY

Cisco
Avaya
Alcatel-Lucent
Fritz
Skype
Gigaset
Asterisk
Yealink
Wildix



VIDEO MANAGEMENT SYSTEMS

Milestone
Axis Communications
Genetec
DigiFort
Axxon
Onvif
See Tec
Aimetis
Digivod
Netavis



HOME AUTOMATION

Control4
Savant
Fibaro

Accessories



Backplate
9155068



Box for Installation
in the Wall
9155017



Technical Specification

- **Signalling protocol:** SIP 2.0 (RFC - 3261)
- **Microphone:** 1 built-in microphone, Speaker 2W
- **Camera (optional) Resolution:** JPEG 1280 x 960px – video call 640 x 480px
- **Viewing angle** 120° (H), 90° (V), 145° (D)
- **Night vision:** Yes Automatic IR cut filter and IR light
- **Video stream:** Codecs H.263+, H.263, H.264, MJPEG, MPEG-4
- **Power supply:** 12V \pm 15%/ 2A DC, or PoE 802.3af (Class 0 - 12.95W)

