

MC 14 T

Stainless Steel Cable Protection

Technical data

Outer diameter mm	14
Inner diameter mm	10.5
Max cable diameter mm	8.8




Flexible and durable armoured flexi-tube cable protection in stainless steel. Suitable for protection of cables in exposed environments. Plastic conduit in each end of the steel tubing protect cables from wear or breakage. Outside diameter of 14.0 mm and inner diameter of 10.5 mm. Maximum cable diameter of 8.8 mm. The armoured flexi-tube cable protection is compatible with the DL H14 mounting plate/end caps and corresponds to the metal tubing in the DL 14 cable loop.

Length:

MC 14 T2 0,5 m (50 cm)

MC 14 T4 1,0 m (100 cm)

MC 14 T7 2,0 m (200 cm)

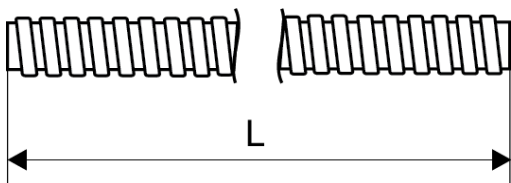

MC 14 T2 - L = 50 cm
MC 14 T4 - L = 100 cm
MC 14 T7 - L = 200 cm