



RLI – STEADY LIGHT REPEATER FOR EMBEDDED

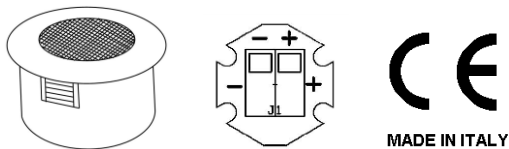

- FOR FIXED DIAMETER HOLE 25mm
- POWER SUPPLY FROM 3 Vdc TO 30 Vdc
- MAX CURRENT CONSUMPTION 10 mA
- OPERATING TEMPERATURE FROM +5°C TO +50°C
- WEIGHT 8 gr

Rev.0 Page 1 of 1


RLI – STEADY LIGHT REPEATER FOR EMBEDDED

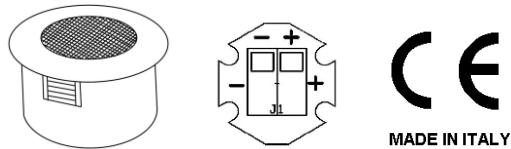

- FOR FIXED DIAMETER HOLE 25mm
- POWER SUPPLY FROM 3 Vdc TO 30 Vdc
- MAX CURRENT CONSUMPTION 10 mA
- OPERATING TEMPERATURE FROM +5°C TO +50°C
- WEIGHT 8 gr

Rev.0 Page 1 of 1


RLI – STEADY LIGHT REPEATER FOR EMBEDDED

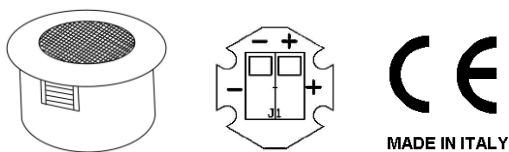

- FOR FIXED DIAMETER HOLE 25mm
- POWER SUPPLY FROM 3 Vdc TO 30 Vdc
- MAX CURRENT CONSUMPTION 10 mA
- OPERATING TEMPERATURE FROM +5°C TO +50°C
- WEIGHT 8 gr

Rev.0 Page 1 of 1


RLI – STEADY LIGHT REPEATER FOR EMBEDDED

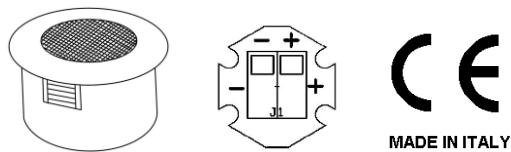

- FOR FIXED DIAMETER HOLE 25mm
- POWER SUPPLY FROM 3 Vdc TO 30 Vdc
- MAX CURRENT CONSUMPTION 10 mA
- OPERATING TEMPERATURE FROM +5°C TO +50°C
- WEIGHT 8 gr

Rev.0 Page 1 of 1


RLI – STEADY LIGHT REPEATER FOR EMBEDDED

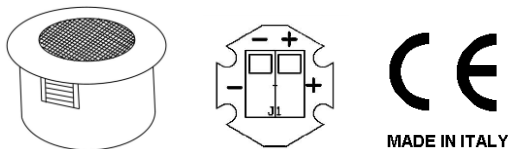

- FOR FIXED DIAMETER HOLE 25mm
- POWER SUPPLY FROM 3 Vdc TO 30 Vdc
- MAX CURRENT CONSUMPTION 10 mA
- OPERATING TEMPERATURE FROM +5°C TO +50°C
- WEIGHT 8 gr

Rev.0 Page 1 of 1


RLI – STEADY LIGHT REPEATER FOR EMBEDDED

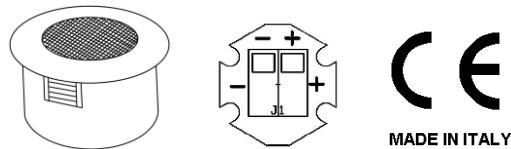

- FOR FIXED DIAMETER HOLE 25mm
- POWER SUPPLY FROM 3 Vdc TO 30 Vdc
- MAX CURRENT CONSUMPTION 10 mA
- OPERATING TEMPERATURE FROM +5°C TO +50°C
- WEIGHT 8 gr

Rev.0 Page 1 of 1


RLI – STEADY LIGHT REPEATER FOR EMBEDDED

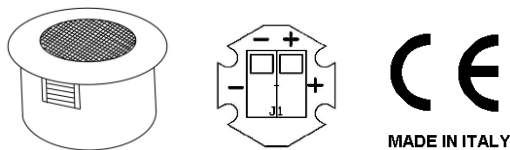

- FOR FIXED DIAMETER HOLE 25mm
- POWER SUPPLY FROM 3 Vdc TO 30 Vdc
- MAX CURRENT CONSUMPTION 10 mA
- OPERATING TEMPERATURE FROM +5°C TO +50°C
- WEIGHT 8 gr

Rev.0 Page 1 of 1

RLI – STEADY LIGHT REPEATER FOR EMBEDDED

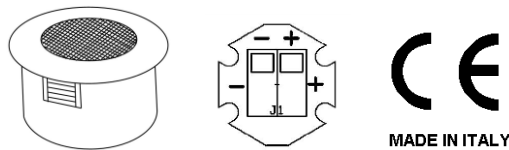

- FOR FIXED DIAMETER HOLE 25mm
- POWER SUPPLY FROM 3 Vdc TO 30 Vdc
- MAX CURRENT CONSUMPTION 10 mA
- OPERATING TEMPERATURE FROM +5°C TO +50°C
- WEIGHT 8 gr

Rev.0 Page 1 of 1