


GEMMA-A

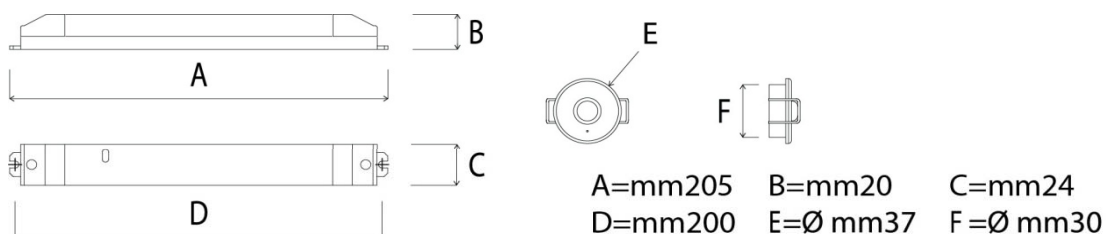
Cod. GMSE0A0320-B

**Introduction**

GEMMA series self-contained LED emergency spotlight with self-extinguishing white polycarbonate body. Symmetrical lens for antipanic area. False ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux 150 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Protection rating IP20, double insulated, operating temperature 0 °C ÷ 50 °C.

Description

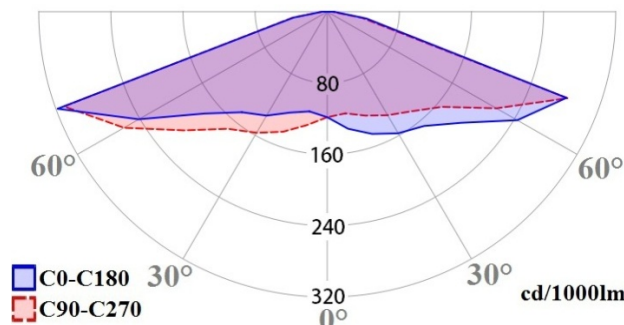
Product series	GEMMA
Product type	Emergency spotlight
Version	Standard
Type	Non-Maintained
Lens	Symmetrical for antipanic area

**Technical specifications**

Installation	False ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	1.5 W
Maximum absorbed power in VA	3.7 VA
Battery	LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H



Body	Polycarbonate
Glow wire	850 °C
Colour	White
IP Protection rating	IP20
Insulation class	II
Operating temperature	0° - 50°C
Compliant to standards	EN 60598-2-2, EN 60598-2-22, EN 60598-1, EN 55015, EN 61547

Light source	LED
Colour temperature	4000K
Minimum luminous flux	150 lm



GEMMA-C

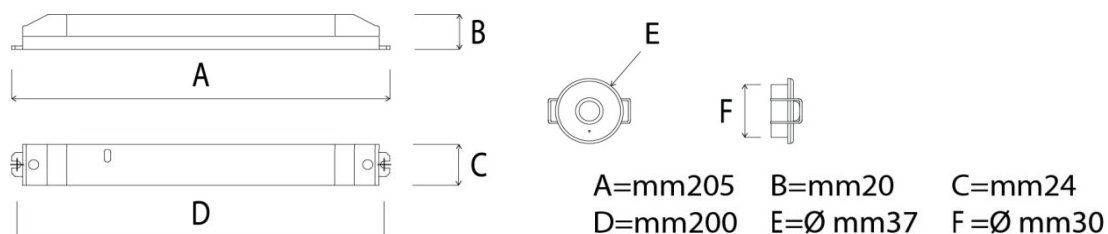
Cod. GMSE0C0320-B

**Introduction**

GEMMA series self-contained LED emergency spotlight with self-extinguishing white polycarbonate body. Asymmetrical lens for escape route. False ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux 150 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Protection rating IP20, double insulated, operating temperature 0 °C ÷ 50 °C.

Description

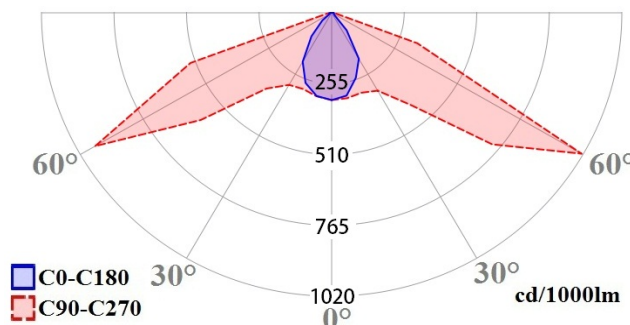
Product series	GEMMA
Product type	Emergency spotlight
Version	Standard
Type	Non-Maintained
Lens	Asymmetrical for escape route

**Technical specifications**

Installation	False ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	1.5 W
Maximum absorbed power in VA	3.7 VA
Battery	LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H


Body	Polycarbonate
Glow wire	850 °C
Colour	White
IP Protection rating	IP20
Insulation class	II
Operating temperature	0° - 50°C
Compliant to standards	EN 60598-2-2, EN 60598-2-22, EN 60598-1, EN 55015, EN 61547

Light source	LED
Colour temperature	4000K
Minimum luminous flux	150 lm



GEMMA-M

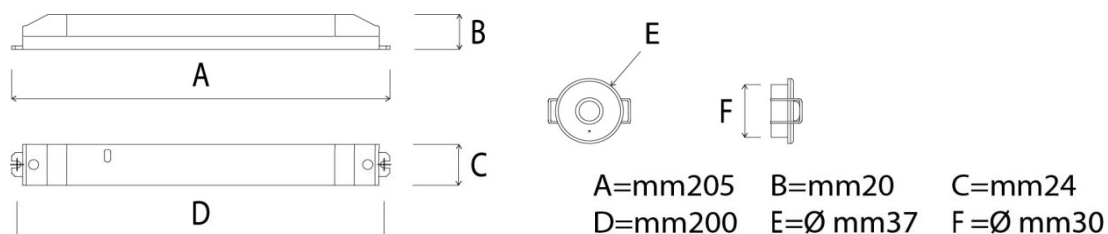
Cod. GMSE0M0320-B

**Introduction**

GEMMA series self-contained LED emergency spotlight with self-extinguishing white polycarbonate body. Asymmetrical lens for wall installation, recessed in vertical plasterboard. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux 150 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Protection rating IP20, double insulated, operating temperature 0 °C ÷ 50 °C.

Description

Product series	GEMMA
Product type	Emergency spotlight
Version	Standard
Type	Non-Maintained
Lens	Asymmetrical for wall installation

**Technical specifications**

Installation	Recessed in vertical plasterboard
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	1.5 W
Maximum absorbed power in VA	3.7 VA
Battery	LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H

Body	Polycarbonate
Glow wire	850 °C
Colour	White
IP Protection rating	IP20
Insulation class	II
Operating temperature	0° - 50°C
Compliant to standards	EN 60598-2-2, EN 60598-2-22, EN 60598-1, EN 55015, EN 61547

Light source	LED
Colour temperature	4000K
Minimum luminous flux	150 lm

