



## NYLON TUBING

(ABS018)

To join the trunk adapter to the sampling head of choice:  
Flush, Conical or Discrete.

### Installation Instructions:

Push fit into both the trunk adapter and the sampling head.

Do not paint.


Keep pipe clean and free from dust.

Do not install in direct sunlight.

Only install with approved pipe.

Do not use solvents to clean,  
only soapy water.

<b>Part No.</b>	<b>ABS018</b>
<b>Pipe colour</b>	<b>RED</b>
<b>Diameter Tolerance</b>	<b>+/- 0.15mm</b>

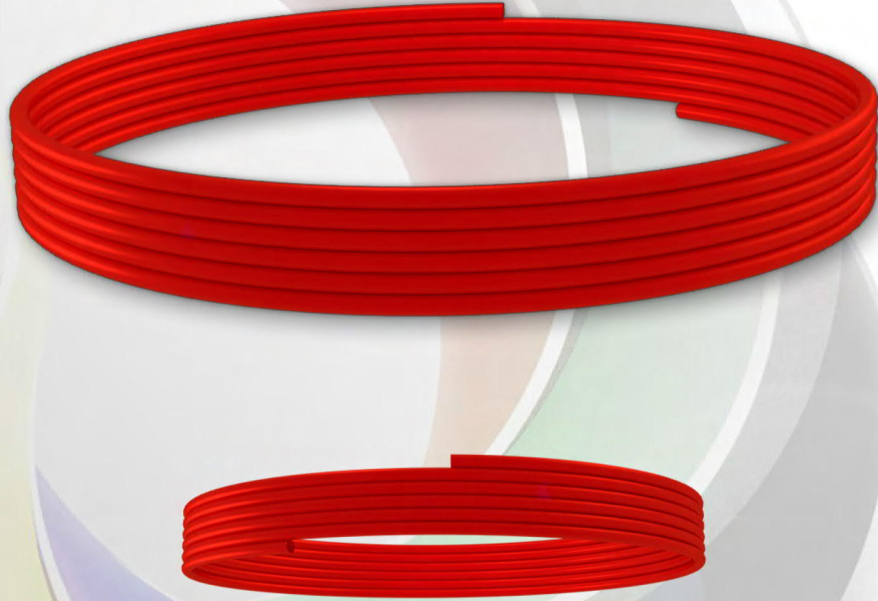

#### RAW MATERIAL DATA

##### Nylon

NEM 10x2.5 -  
OD Tols: +0.03/-0.09mm  
Burst Pressure 993 PSI / 68 bar  
Bend Radius 40mm  
Weight/30m 1.08kgs

NEM 10x8 -  
OD Tols: +0.02/-0.10mm  
Burst Pressure 772 PSI / 53 bar  
Bend Radius 30mm  
Weight/30m 0.87kgs

Temperature Range: -  
-40°C to +120°C Occasional use up to  
+130°C. Brittle point: -70°C

Technical information for use as  
a guide only.

Pressure values given are based on  
the short term burst pressure at 20°C  
based on a 3:1 safety factor.  
Any increase in temperature above  
20°C will result in a decline in working  
pressure values.

Products and specifications are subject  
to improvements and change without  
notice.