

## MC 640-5

## Magnetic contact

### Recessed and surface mount, NC




#### Technical data

Installation method	Recessed / Surface mount
Contact function	Normally Closed (NC)
Approvals	EN-ST-000093 Grade 2, Class IIIA VdS G 199523 Class B, INCERT B-582-1003 SBSC 9-215 Class 2, F&P, FG
Contact rating	48 VDC / 500 mA / 10 VA
Magnet type	Alnico 5
Make distance (wood) mm	24
Make distance (steel) mm	6
Tamper protection	Yes
Connection	Cable
Operating temperature range	-40 - +70°C
Housing material, Colour	ABS plastic, white or black
Housing protection class	IP 67
Contact dimensions (L x W x H) mm	61 x 9 x 9
Magnet dimensions (L x W x H) mm	61 x 9 x 9




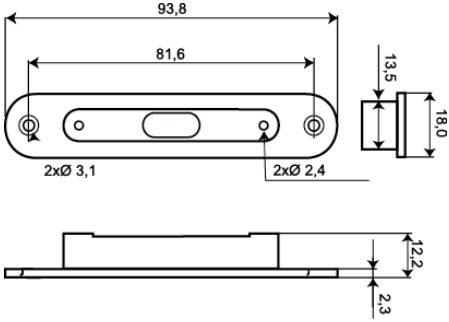

MC 640 is a magnetic contact with NC function that can be used in both alarm and access control systems for monitoring e.g. doors and windows against unauthorized opening. Both the contact and the magnet part are in a water proof (IP 67) plastic housing for recessed and surface installation. The accessory MC 600-1 is a flange for installation in hollow profiles or window frames.

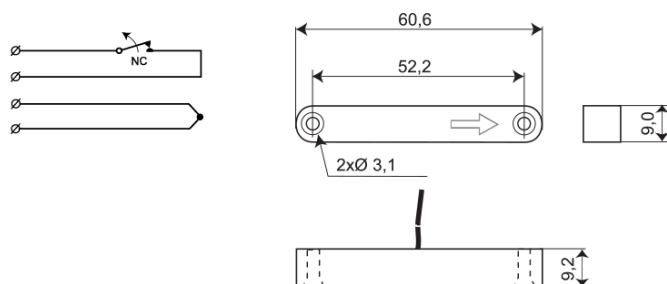

#### ORDERING INFORMATION

Model	Description
MC 640	Recessed magnetic contact, NC, 5 m cable
MC 640-BL	Recessed magnetic contact, NC, 5 m cable, black

## Related products and accessories

	<p><b>MC 600-1</b></p> <p>Plastic Housing for MC 640-5</p>	
	<p><b>MC 600-M</b></p> <p>Spare magnet for MC 600 series</p>	