

MC 272

High Security Contact, NC/NO






Technical data

Installation method	Recessed mounting
Contact function	Change-over (NC/NO)
Approvals	SBSC 9-206, Class 3/4
Contact rating	48 VDC / 250 mA / 5 VA
Drill diameter mm	9-10
Magnet type	Alnico 5
Mounting on steel	Only with accessories
Make distance (wood) mm	20
Sabotage distance (wood) mm	2
Make distance (metal) mm	X
Sabotage distance (metal) mm	X
Tamper protection	Yes
Connection	Cable
Housing material	Al-alloy
Operating temperature range	-40°C - +70°C
Housing protection class	IP 67
Contact dimensions (L x Ø) mm	37 x 11
Magnet dimensions (L x Ø) mm	37 x 11



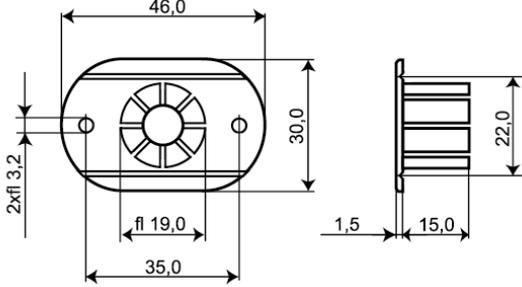

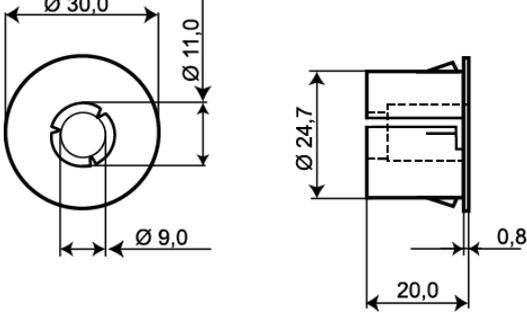
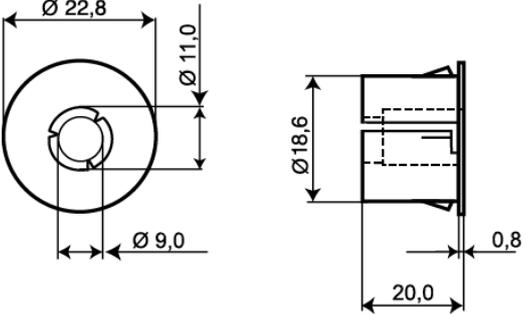
MC 272 is a universal magnetic contact with a change-over (NC/NO) function for high security systems that can be used both in alarm and access control systems for monitoring e.g. doors and windows against unauthorized opening. The contact is specially designed for use in banks, museums, art galleries, stores, etc. Both the contact and the magnet part are of Al-alloy and formed in the shape of a threaded screw, which enables easy installation into wood or plastic. With our extensive range of installation accessories it is easy to install the contact recessed on metal and other materials. Contact and magnet are paired. To ensure proper functionality, do not replace the contact or magnet alone.



ORDERING INFORMATION

Model	Description
MC 272	Recessed high security contact, NC/NO, 2 m cable
MC 272-6	Recessed high security contact, NC/NO, 6 m cable
MC 272-10	Recessed high security contact, NC/NO, 10 m cable

Related products and accessories

	<p>MC 200-S11</p> <p>Plastic Flange for MC 240, 246, 247, 250, 255, 270, 272, 275</p>		 <p>Ø 23 mm</p>
	<p>MC 200-S21</p> <p>Plastic Snap-in Flange for MC 240, 246, 247, 250, 255, 270, 272, 275</p>		 <p>Ø 25 mm</p>
	<p>MC 200-S31</p> <p>Plastic Snap-in Flange for MC 240, 246, 247, 250, 255, 270, 272, 275</p>		 <p>Ø 19 mm</p>