

MC 346


Magnetic Contact,
Recessed mounting, NC/NO

Technical data

| | |
|-------------------------------|--|
| Installation method | Recessed mounting |
| Contact function | Change-over (NC/NO) |
| Approvals | EN 50131-2-6 Grade 2, Class IIIA, INCERT B-582-0014, SBSC 9-203, Class 1/2, NBU T02-3/2019, FG |
| Contact rating | 48 VDC / 250 mA / 5 VA |
| Drill diameter mm | 8 |
| Magnet type | Alnico 5 |
| Mounting on steel | Not recommended |
| Make distance (wood) mm | 13 |
| Make distance (steel) mm | X |
| Tamper protection | Yes |
| Connection | Cable |
| Housing material | ABS Plastic |
| Operating temperature range | -40°C – +70°C |
| Housing protection class | IP 67 |
| Contact dimensions (L x Ø) mm | 36 x 9 |
| Magnet dimensions (L x Ø) mm | 26 x 6 |
| Grade | 2 |




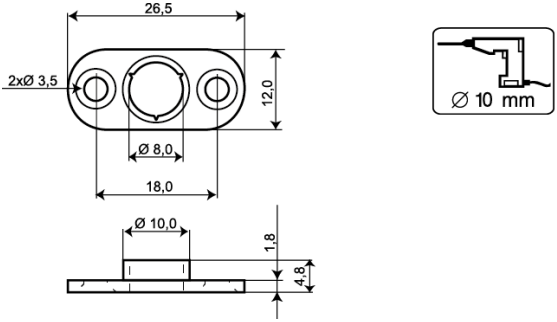

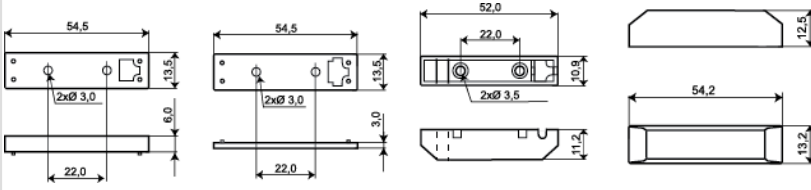

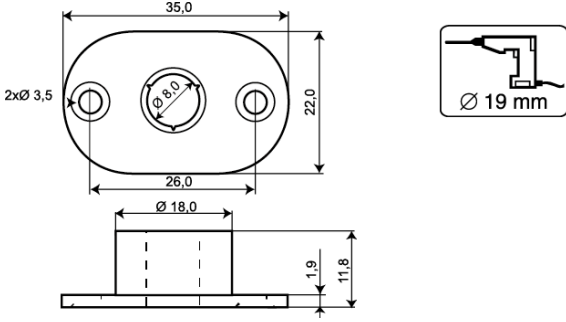

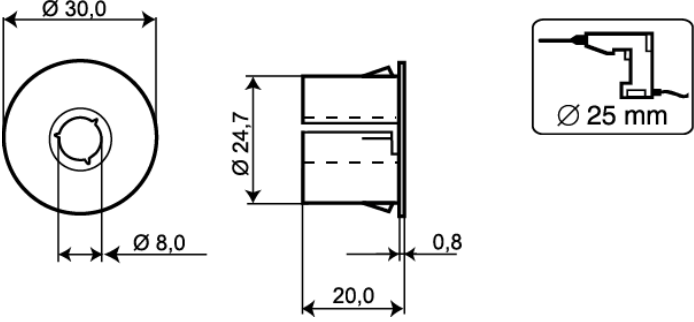

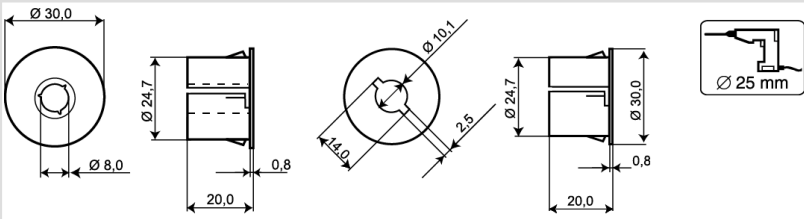
MC 346 is a universal magnetic contact with change-over (NC/NO) function that can be used in both alarm and access control systems for monitoring e.g. doors and windows against unauthorized opening. Both the contact and the magnet part are in a water proof (IP 67) plastic housing, which enables easy installation into wood without additional accessories. With our extensive range of installation accessories it is easy to install the contact either recessed or as a surface mount.

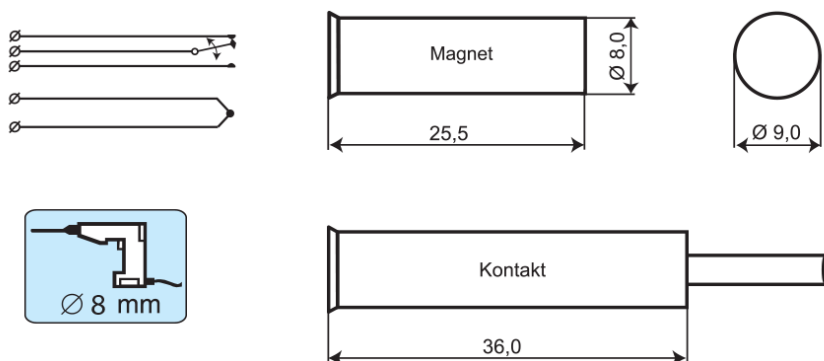


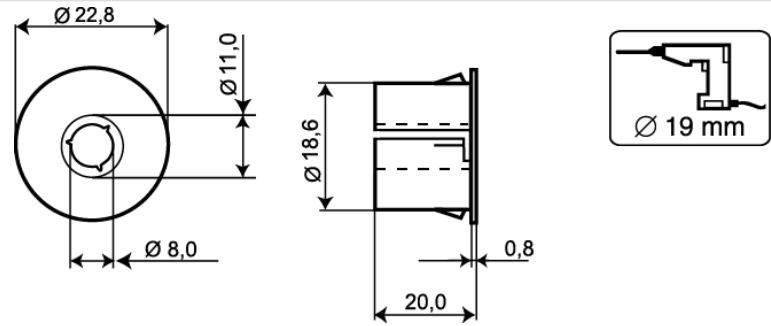

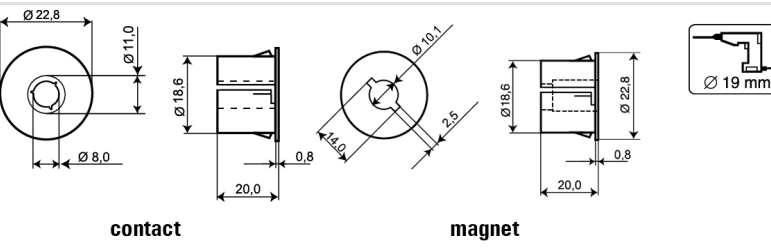

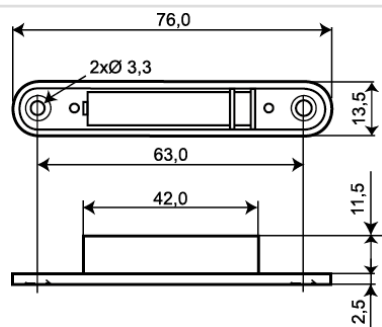
ORDERING INFORMATION

| Model | Description |
|-----------|--|
| MC 346 | Recessed magnetic contact, change-over, 2 m cable |
| MC 346-5 | Recessed magnetic contact, change-over, 5 m cable |
| MC 346-10 | Recessed magnetic contact, change-over, 10 m cable |
| MC 346-C | Recessed contact part without magnet, change-over, 5 m cable |

Related products and accessories

| | | |
|---|--|---|
|  | <p>MC 300-S1</p> <p>Plastic flanges for MC 340, 346, 347, 370</p> |  |
|  | <p>MC 300-S3</p> <p>Plastic Housing for MC 340, 346, 347</p> |  |
|  | <p>MC 300-S11</p> <p>Plastic Flange for MC 340, 346, 347 and 370</p> |  |
|  | <p>MC 300-S21</p> <p>Plastic Snap-in Flange for MC 340, 346, 347, 370</p> |  |
|  | <p>MC 300-S22</p> <p>Snap-in Flange with Strong Magnet for MC 340, 346, 347</p> |  <p style="text-align: center;">contact magnet</p> |

Related products and accessories

| | | |
|--|--|---|
|  | <p>MC 300-S31</p> <p>Plastic Snap-in Flange for MC 340, 346, 347, 370</p> |  |
|  | <p>MC 300-S32</p> <p>Snap-in Flange with Strong Magnet for MC 340, 346, 347</p> |  <p style="text-align: center;">contact magnet</p> |
|  | <p>MC 300-S35</p> <p>Plastic Housing for MC 340, 346, 347</p> |  |