

MC 246-LSZH

Magnetic Contact, Recessed mounting, NC/NO, halogen-free cable



Technical data

Installation method	Recessed mounting
Contact function	Change-over (NC/NO)
Approvals	EN 50131-2-6 Grade 2, Class IIIA, INCERT B-582-1002, SBSC 9-197, Class 2, F&P, FG, NF&A2P, CNPP 2124030001B0, GRADE 2 + RTC
Contact rating	48 VDC / 250 mA / 5 VA
Drill diameter mm	9-10
Magnet type	Alnico 5
Mounting on steel	Only with accessories
Make distance (wood) mm	20
Make distance (steel) mm	X
Tamper protection	Yes
Connection	Halogen-free cable
Housing material	Al-alloy
Operating temperature range	-40°C - +70°C
Housing protection class	IP 67
Contact dimensions (L x Ø) mm	37 x 11
Magnet dimensions (L x Ø) mm	37 x 11



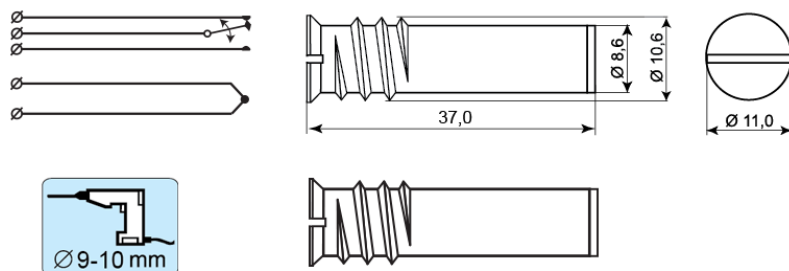
MC 246 is a universal magnetic contact with change-over (NC/NO) function that can be used in both alarm and access control systems for monitoring e.g. doors and windows against unauthorized opening.

Both the contact and the magnet part are made of Al-alloy and formed in the shape of a threaded screw, which enables easy installation into wood or plastic.

With our extensive range of installation accessories it is easy to install the contact either recessed or as a surface mount on metal and other materials.

With appropriate accessories, the contact can even be installed on steel doors, safety valves, garage doors, etc.

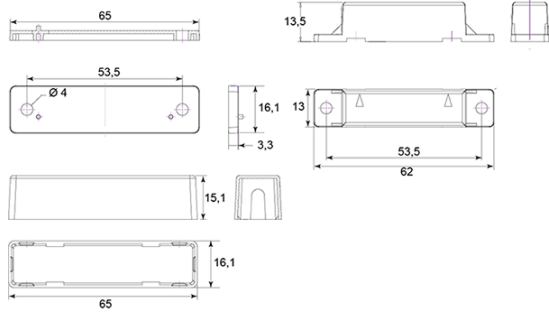
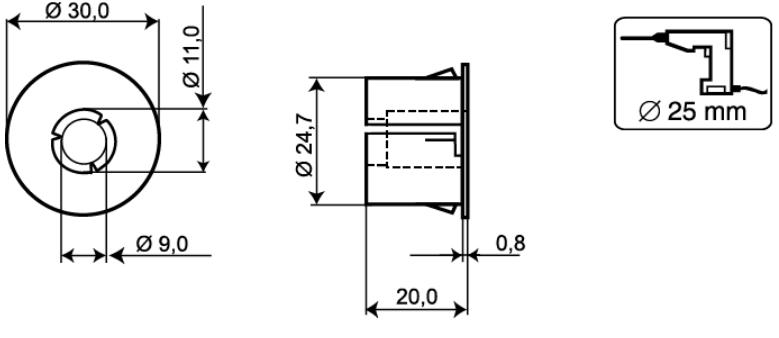
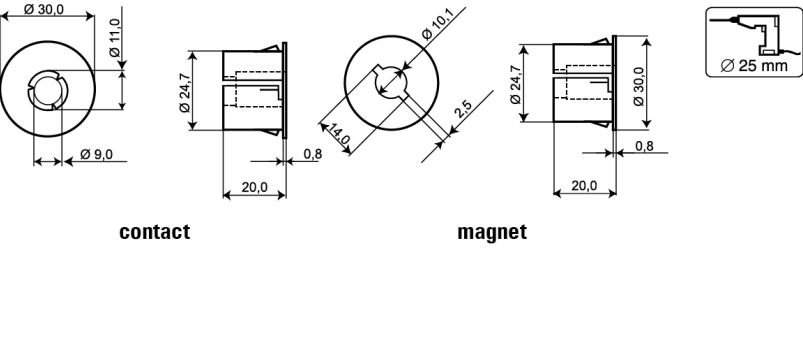
The contact part is sealed with special epoxy, making it water resistant.



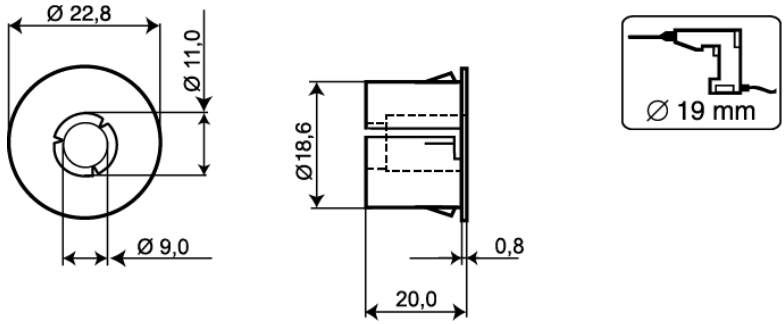
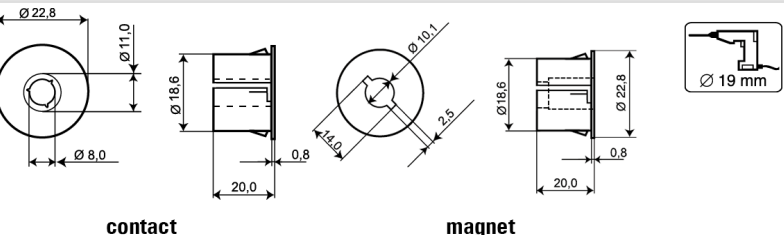
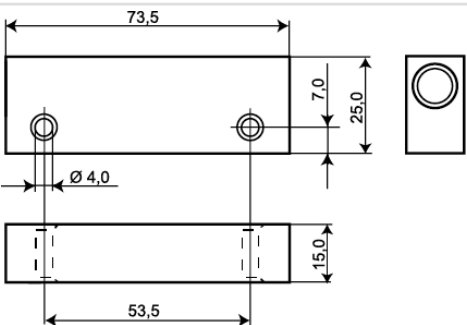
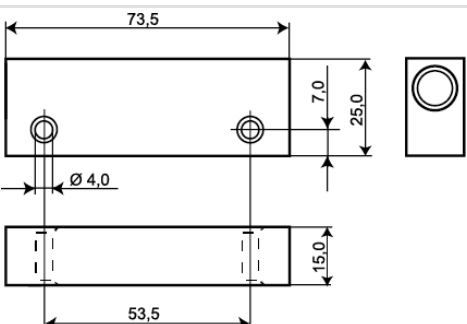

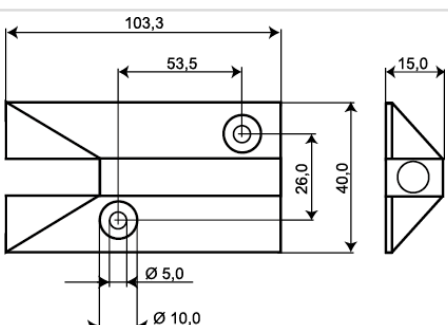
ORDERING INFORMATION

Model	Description
MC 246-LSZH-6	Recessed magnetic contact, change-over, 6 m halogen-free cable
MC 246-LSZH-10	Recessed magnetic contact, change-over, 10 m halogen-free cable

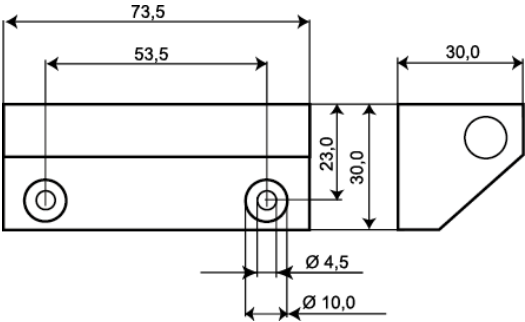
Related products and accessories

	MC 200-S3 Plastic Housing for MC 240, 246 and 247	
	MC 200-S11 Plastic Flange for MC 240, 246, 247, 250, 255, 270, 272, 275	
	MC 200-S21 Plastic Snap-in Flange for MC 240, 246, 247, 250, 255, 270, 272, 275	
	MC 200-S22 Snap-in Flange with Strong Magnet for MC 240, 246, 247 and 255	 contact magnet

Related products and accessories

	MC 200-S31 Plastic Snap-in Flange for MC 240, 246, 247, 250, 255, 270, 272, 275	
	MC 200-S32 Snap-in Flange with Strong Magnet for MC 240, 246, 247, 255	 contact magnet
	MC 200-4 Aluminium Housing for MC 240, 246 and 247	
	MC 200-5 Aluminium Part with Extra Strong Magnet for MC 240, 246 and 247	
	MC 200-6 Aluminium Housing for Floor Installation for MC 240, 246 and 247	

Related products and accessories

	MC 200-7 Aluminium Housing for MC 240, 246 and 247	
	MC 200-8 Aluminium Part with Extra Strong Magnet for MC 240, 246 and 247	